



## ACSR Ratcheting Cable Cutters

- Cutting inserts are easily replaced by simply removing 3 screws per blade
- Tool can be locked when not in use
- High-leverage ratcheting mechanism for easier cutting
- Plastic covered handles with hand guards for comfort and firm grip
- At a length of just under 14" tool can be carried in a tool pouch (Cat. No. 63800ACSR)



**ACSR Cable Cutter**  
(63607)

Cleanly cuts 336 MCM Linnet ACSR and 2/0 triplex steel messenger cable.



63607

Max. Cable Capacity: 336 MCM ACSR, 600 MCM Aluminum, 400 MCM Copper




63800ACSR

Max. Cable Capacity: 477 MCM ACSR, 1000 MCM Aluminum, 600 MCM Copper, 1/2" Guy Strand

### MCM Maximum Cable Capacity

Cat. No.	ACSR	Stranded Aluminum	Copper	Guy Strand	Length	Handle Color	Weight (lbs.)
63607	336 MCM (170 mm <sup>2</sup> )	600 MCM (300 mm <sup>2</sup> )	400 MCM (185 mm <sup>2</sup> )	—	10-1/4" (260 mm)	yellow	1.50
63800ACSR	477 MCM (273 mm <sup>2</sup> )	1000 MCM (500 mm <sup>2</sup> )	600 MCM (300 mm <sup>2</sup> )	1/2" (13 mm)	13-3/4" (349 mm)	red	3.20
<b>Replacement Cutting Inserts (with set of 6 screws)</b>			<b>Fits Klein Cat. No.</b>				
63858			63800ACSR				

## Ratcheting Cutter — Heavy-Duty

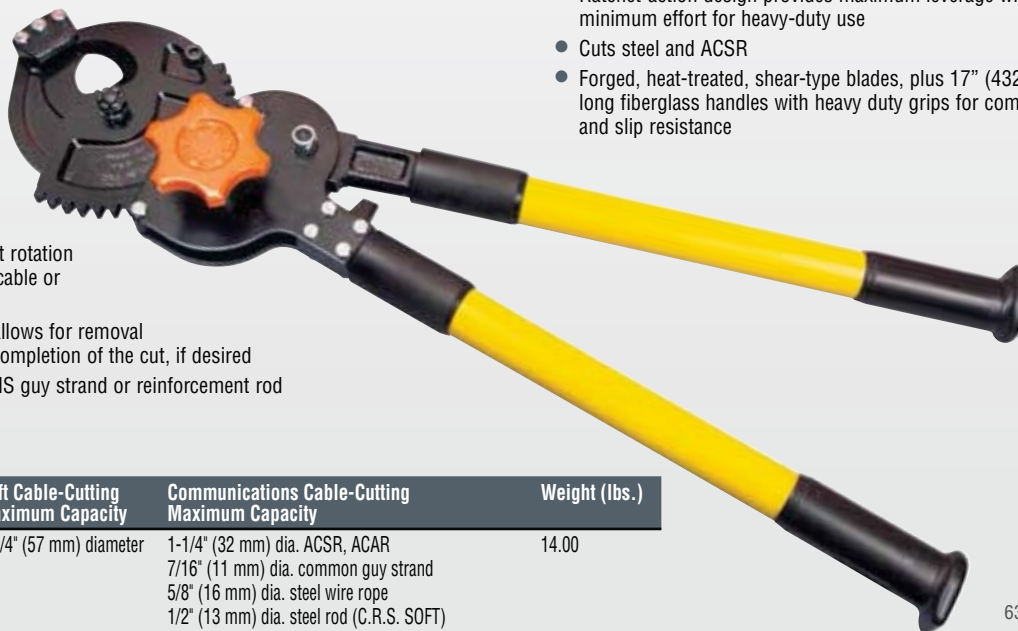

- Blade-advance knob for fast rotation of the blade to engage the cable or other material being cut
- Quick-release mechanism allows for removal of the cable or rod before completion of the cut, if desired
- Not designed for cutting EHS guy strand or reinforcement rod

- Ratchet-action design provides maximum leverage with minimum effort for heavy-duty use
- Cuts steel and ACSR
- Forged, heat-treated, shear-type blades, plus 17" (432mm) long fiberglass handles with heavy duty grips for comfort and slip resistance

Cat. No.	Overall Length	Soft Cable-Cutting Maximum Capacity	Communications Cable-Cutting Maximum Capacity	Weight (lbs.)
63700	28" (711 mm)	2-1/4" (57 mm) diameter	1-1/4" (32 mm) dia. ACSR, ACAR 7/16" (11 mm) dia. common guy strand 5/8" (16 mm) dia. steel wire rope 1/2" (13 mm) dia. steel rod (C.R.S. SOFT) 750 MCM (1-3/8" dia.) (35 mm) copper or aluminum	14.00

63700