

# Product data sheet

## Characteristics

# XVC4B4

Monolithic pre wired tower light, Harmony XVC, plastic, red orange green blue, 40mm, tube mounting, steady, IP23, 24V AC DC



### Main

Range of Product	Harmony XVC4
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	4 illuminated units
Sound signalling	Without
Mounting diameter	1.57 in (40 mm)
Component name	XVC
Device short name	XVC
Light source	LED steady red LED steady orange LED steady green LED steady blue
Supply circuit type	AC/DC

### Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover SGP (chromium-plated): support tube
Mounting Location	On support tube, 17 mm
Product mounting	On support tube, 17 mm
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
Cable cross section	0.00 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG Gauge	AWG 22
Cable length	23.62 in (600 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current Consumption	100 mA
Flashing frequency	1 Hz
Net Weight	1.23 lb(US) (0.56 kg)
Height	20.02 in (508.5 mm)

### Environment

Standards	IEC 61000-6-3 IEC 61000-6-2
Product Certifications	UL
Protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature for Operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class I IEC 61140
Overvoltage category	Class I IEC 61140
IP degree of protection	IP23 vertical surface installation IEC 60529

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Ordering and shipping details

Category	22617-XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	3606480032400
Returnability	Yes
Country of origin	ID

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.64 in (6.700 cm)
Package 1 Width	29.49 in (74.900 cm)
Package 1 Length	2.68 in (6.800 cm)
Package 1 Weight	21.66 oz (614.000 g)
Unit Type of Package 2	P06
Number of Units in Package 2	10
Package 2 Height	17.72 in (45.000 cm)
Package 2 Width	23.62 in (60.000 cm)
Package 2 Length	31.50 in (80.000 cm)
Package 2 Weight	33.07 lb(US) (15.000 kg)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>


## Contractual warranty

Warranty	18 months
----------	-----------

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

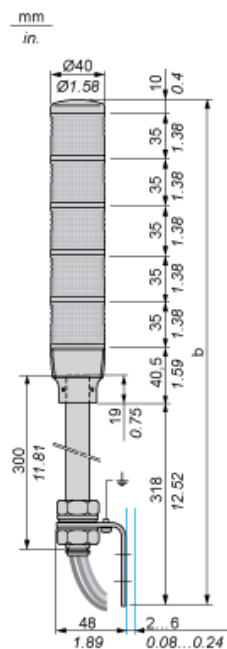

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in.)
1 stage	403.50	15.89
2 stages	438.50	17.26
3 stages	473.50	18.64
4 stages	508.50	20.02
5 stages	543.50	21.40

---

Pre-assembled and Pre-wired Tower Light

---

Support Tube Mounting

