

# Specialty Cushion-Grip Screwdrivers

## Screw-Holding Screwdrivers

### Additional Features:

- Starts and drives screws with one hand when working in hard-to-reach spaces.



| Cat. No. | Tip Type | Tip Size    | Shank Length | Overall Length   | Weight (lbs.) |
|----------|----------|-------------|--------------|------------------|---------------|
| 32215    | cabinet  | 1/4" (6 mm) | 7" (178 mm)  | 11-1/4" (276 mm) | 0.32          |
| 32216    | Phillips | #2          | 7" (178 mm)  | 11-1/4" (276 mm) | 0.32          |

## Terminal Block Screwdriver

### Additional Features:

- Precision-machined cabinet tip provides exact fit for terminal block screws.
- Tip is up to 19% stronger than competitors and provides 76% higher torque value than the required ASME B107 Standard.




| Cat. No. | Shank Tip Width | Shank Length | Overall Length  | Weight (lbs.) |
|----------|-----------------|--------------|-----------------|---------------|
| 612-4    | 1/8" (3 mm)     | 4" (100 mm)  | 7-3/4" (200 mm) | 0.15          |

## Wire Bending Screwdrivers – Round-Shanks

### Additional Feature:

- Metal stud offers a convenient and easy way to bend, loop and connect solid wire when installing outlets and switches.

| Cat. No.             | Tip Size    | Shank Length | Overall Length     | Bends AWG Gauges     |
|----------------------|-------------|--------------|--------------------|----------------------|
| <b>Cabinet Tip</b>   |             |              |                    |                      |
| 605-4B               | 1/4" (6 mm) | 4" (102 mm)  | 8-11/32" (212 mm)  | Nos. 10, 12, 14 0.25 |
| 605-6B               | 1/4" (6 mm) | 6" (152 mm)  | 10-11/32" (263 mm) | Nos. 10, 12, 14 0.30 |
| <b>Phillips Tip</b>  |             |              |                    |                      |
| 603-3B               | #1          | 3" (76 mm)   | 6-3/4" (171 mm)    | Nos. 12 and 14 0.15  |
| 603-4B               | #2          | 4" (102 mm)  | 8-5/16" (211 mm)   | Nos. 10, 12, 14 0.25 |
| <b>Square Recess</b> |             |              |                    |                      |
| 661B                 | #1          | 4" (102 mm)  | 8-1/4" (210 mm)    | Nos. 10, 12, 14 0.20 |
| 662B                 | #2          | 4" (102 mm)  | 8-1/4" (210 mm)    | Nos. 10, 12, 14 0.30 |

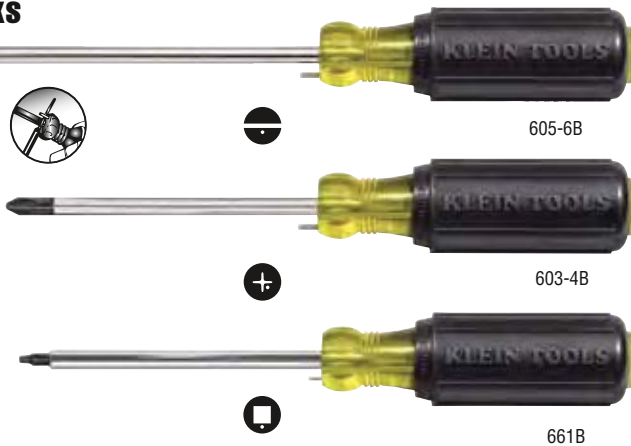

## Multi-Bit Cushion-Grip Screwdrivers/Nut Drivers

### Heavy-Duty Multi-Bit Screwdriver/Nut Driver

- Superior torque for tough applications.
- Interchangeable shaft holds six universal tips; converts to three nut driver sizes and one hex driver.
- Strong, heat-treated nut drivers for improved torque.



| Cat. No. | Shaft Length  | Overall Length | Weight (lbs.) |
|----------|---------------|----------------|---------------|
| 32557    | 2.95" (75 mm) | 7.9" (201 mm)  | 0.48          |



### Ratcheting Multi-Bit Screwdriver/Nut Driver

- High torque 3-way ratcheting mechanism, forward, reverse and locked positions for tough applications.
- Interchangeable shaft holds six universal tips; converts to three nut driver sizes and one hex driver.
- Strong, heat-treated nut drivers for improved torque.



| Cat. No. | Shaft Length  | Overall Length | Weight (lbs.) |
|----------|---------------|----------------|---------------|
| 32558    | 2.95" (75 mm) | 7.9" (201 mm)  | 0.48          |



All dimensions are in inches and (millimeters).



[www.kleintools.com](http://www.kleintools.com)

See page 296 for additional information on warnings.

