

# SLMT4-10W

4" SLIMLED MULTI, up to 1000 Lumens, 10 Watt,  
Color Selectable, "Dead Front" Trim  
Recessed Downlighting

| Job Information |  |      |
|-----------------|--|------|
| Project Name    |  | Type |
| Location        |  |      |
| Quantity        |  | Date |
| Contact/Phone   |  |      |
| Notes           |  |      |

## Features

### Body

Durable airtight plastic body with mounting holes. On-face magnets allows for securely attaching a selection of dead-front faceplate trims.

### LED Characteristics

This general application light fixture features an 10 watt LED module that maintains uniform intensity producing up to 1000 lumens; with a typical CRI of 95. Available with 5 step CCT switch 2700 K, 3000 K, 3500 K, 4000 K, 5000 K).

### Dimming

100%-10% dimming capability. This fixture is compatible with industry standard forward/reverse phase dimmers, TRIAC/ELV dimmers. For compatible dimmers, visit [www.liteline.com/SlimLEDMulti](http://www.liteline.com/SlimLEDMulti)

### Beam Spread

The fixture lens provides 110° beam spread.

### Mounting

Can be attached to an industry standard 4" octagon boxes with minimum depth of 1.5" (38mm) via mounting holes. See below for appropriate spacing requirements.

### LED Driver

Built-in on board driver with 80mA output and 100-135V AC input.

### Quick Connect push-in terminals

"Quick connect" push-in terminals for fast and easy wiring.

### Operating Temperature

-30°C~40°C (-22°F~104°F)

### Environment

- Suitable for wet locations.
- Fire-rated when used in a steel octagon box.

## SPECIFICATION


|                   |                                            |
|-------------------|--------------------------------------------|
| Application       | Recessed / Flushmount Downlight            |
| Approved Location | Wet                                        |
| Beam Angle        | 110°                                       |
| CCT               | 2700 K / 3000 K / 3500 K / 4000 K / 5000 K |
| Certification     | cETLus                                     |
| Color             | WH                                         |
| CRI               | 95                                         |
| Dimming           | Yes                                        |
| Dimming Tech      | Forward/Reverse phase / TRIAC/ELV          |
| Input             | 100-135V AC, 60Hz                          |
| LM79              | Yes                                        |
| LM80              | Yes                                        |
| Lumens            | Up to 1000                                 |
| Lumens per Watt   | Up to 100                                  |
| Power Factor      | 0.93                                       |
| Projected Life    | 70% @ 50,000 hrs                           |
| Title 24          | JA8                                        |
| Warranty          | Lifetime                                   |
| Wattage           | 10W                                        |

| CCT    | Lumens |
|--------|--------|
| 2700 K | 900    |
| 3000 K | 930    |
| 3500 K | 980    |
| 4000 K | 1000   |
| 5000 K | 990    |



## Description

The SLMT4-10W is a 10 watt 4" round downlight installed onto 4" octagon box. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy-efficiency and streamlined design. Suitable for wet locations.

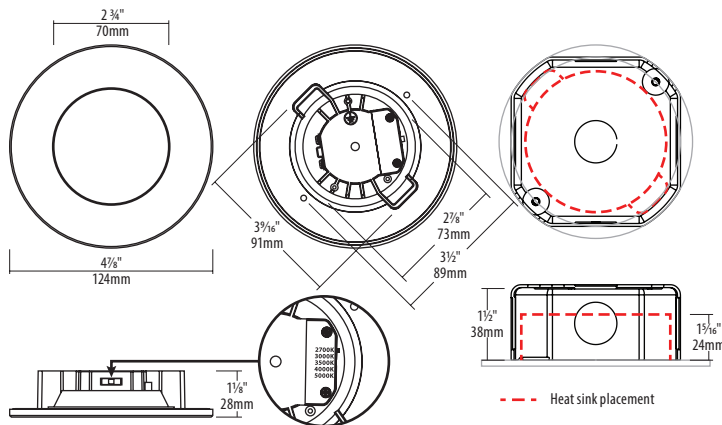

## Ordering Guide



### SLMT4-10W

4" SLIMLED MULTI color selectable round downlight, 10W, with white magnetic trim.

### Notes:

<sup>1</sup> Refer to Environment for more details.

Accessories are sold separately. For additional options please consult your Liteline representative.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

## Accessories



### SLMT4-RT-BK

Round trim for SLIMLED MULTI series, Black.



### SLMT4-RT-BN

Round trim for SLIMLED MULTI series, Brushed nickel.  
NOTE: Not dead-front.



### SLM4-RST-WHWH

Round trim for SLIMLED MULTI series, White/White.



### SLM4-RST-WHSP

Round trim for SLIMLED MULTI series, White/Specular.



### SLM4-RST-WHSS

Round trim for SLIMLED MULTI series, White/Semi-specular.



### SLM4-RST-WHBG

Round trim for SLIMLED MULTI series, White/Gold.



### SLM4-RST-BKBK

Round trim for SLIMLED MULTI series, Black/Black.



### SLM4-RST-BKSP

Round trim for SLIMLED MULTI series, Black/Specular.



### SLM4-RST-BKSS

Round trim for SLIMLED MULTI series, Black/Semi-specular.



### SLM4-RST-BKBG

Round trim for SLIMLED MULTI series, Black/Gold.



### SLMT4-ST-BK

Square trim for SLIMLED MULTI series, Black.



### SLMT4-ST-SL

Square trim for SLIMLED MULTI series, Silver.



### SLMT4-ST-WH

Square trim for SLIMLED MULTI series, White.



### SLM4-SST-WHWH

Square trim for SLIMLED MULTI series, White/White.



### SLM4-SST-WHSP

Square trim for SLIMLED MULTI series, White/Specular.



### SLM4-SST-WHSS

Square trim for SLIMLED MULTI series, White/Semi-specular.



### SLM4-SST-WHBG

Square trim for SLIMLED MULTI series, White/Gold.



### SLM4-SST-BKBK

Square trim for SLIMLED MULTI series, Black/Black.



### SLM4-SST-BKSP

Square trim for SLIMLED MULTI series, Black/Specular.



### SLM4-SST-BKSS

Square trim for SLIMLED MULTI series, Black/Semi-specular.



### SLM4-SST-BKBG

Square trim for SLIMLED MULTI series, Black/Gold.



### LC-CRTL-3WAY-1

OnCloud Smart Wi-Fi 3-way switch. Suitable for 3-way or 4-way switch applications.



### LC-CRTL-DIM-1

OnCloud Smart Wi-Fi dimmer. Features an ON/OFF press and a 7 level touch slider.



### SLMT4-CBPLT

Concrete box mounting plate kit, for SLIMLED MULTI.



### SLMT4-SCREWS

10 pack of 1.5" Replacement screws. Can be used for large gaps between ceiling material and junction box.