



Main

Range of product	Modicon Quantum automation platform
Product or component type	Dc discrete output module
Discrete output number	16

Complementary

Group of channels	2 groups of 8
Discrete output logic	Positive logic (source)
Addressing requirement	1 output word
Discrete output voltage	10...60 V DC
Output voltage limits	10.2...72 V
Absolute maximum output	72 V permanent
Maximum voltage drop	<1 V 2 A
Maximum load current	12 A per module 6 A per group
Surge current	7.5 A 50 s
Response time	<= 1 ms at state 0 to state 1 <= 1 ms at state 1 to state 0
Maximum leakage current	1 mA 60 V
Load inductance	$\text{Inductance(H)} = 0.5 / ((\text{current(A)})^2 \times (\text{switching frequency(Hz)}))$
Associated fuse rating	2 A each point 8 A per group
Isolation between channels and bus	2500 Vrms DC for 1 minute
Isolation between group	700 Vrms DC for 1 minute
Protection type	Internal output protection by 8 A fuse per group
Power dissipation	1 W + (1 V x total module load current)
Marking	CE
Local signalling	Bus communication is present (Active) 1 LED green) External fault detected (F) 1 LED red) Input status 16 LEDs green)
Bus current requirement	160 mA
Module format	Standard
Net Weight	0.99 lb(US) (0.45 kg)

Environment

Protective treatment	Conformal coating Humiseal 1A33
Product certifications	C-tick FM Class 1 Division 2 RMRS GOST
Standards	CSA C22.2 No 142 UL 508
Resistance to electrostatic discharge	4 KV contact IEC 801-2 8 kV on air IEC 801-2
Resistance to electromagnetic fields	9.14 V/m (10 V/m) 80...2000 MHz IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901163213
Nbr. of units in pkg.	1
Package weight(Lbs)	1.09 lb(US) (0.49 kg)
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.77 in (4.5 cm)
Package 1 width	6.50 in (16.5 cm)
Package 1 Length	12.20 in (31 cm)
Unit Type of Package 2	S02
Number of Units in Package 2	2
Package 2 Weight	2.87 lb(US) (1.3 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

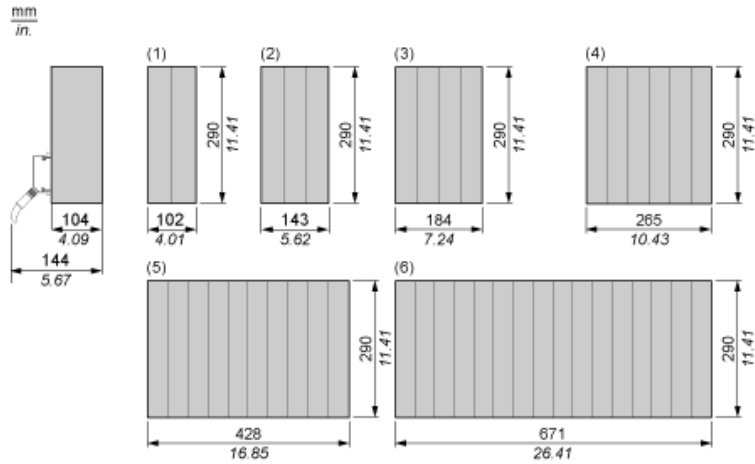

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

10...60 Vdc Discrete Output Source Module

Wiring Diagram

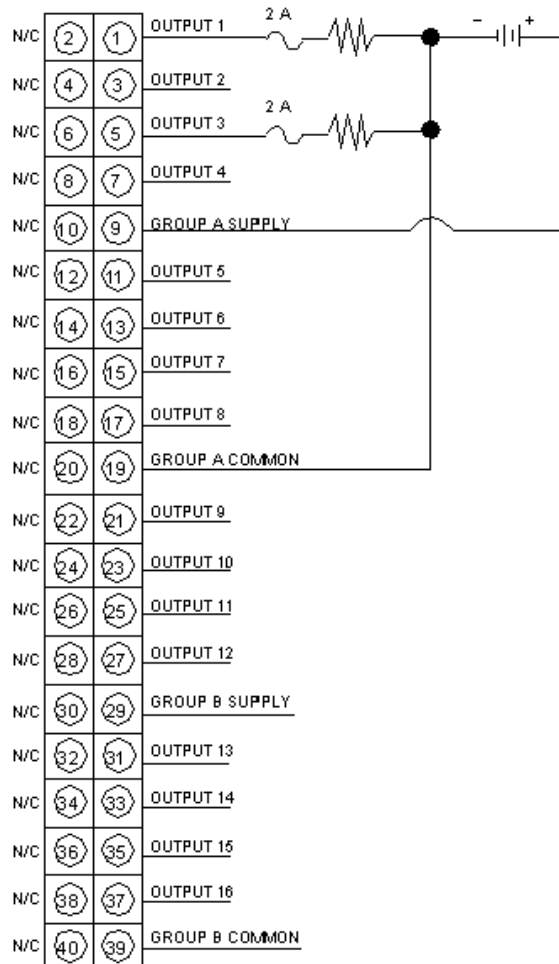

N/C Not Connected