

## MF-SI 10/5 MC SDR

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



Similar to illustration

MultiFit is the Weidmüller marker system used for other makes of terminals. Similar to the Weidmüller Dekafix, the markers of the MultiFit family are available ready-for-use with standard printing.

We recommend to carry out a test with sample markers on the terminals used when using MultiFit for the first time.

- One marker, suitable for different makes of terminals.
- Ready-to-use markers with standard printing
- Blank markers for printing with the PrintJet CONNECT or Plotter
- Delivery of individually printed markers according to customer CAE data or specifications
- One marking system for all applications

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

Version	MultiFit, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Siemens, To customer specification
Order No.	<a href="#">1889170000</a>
Type	MF-SI 10/5 MC SDR
GTIN (EAN)	4032248495474
Qty.	80 pc(s).

## MF-SI 10/5 MC SDR

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Dimensions and weights

Height	10 mm	Height (inches)	0.394 inch
Width	5 mm	Width (inches)	0.197 inch
Net weight	0.25 g		

### Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

### General data

Application/manufacture	Siemens
Colour	To customer specification
Colour of printing	black
Halogen	No
Material	Polyamide 66
Number of markers per combination	1 MultiCard = Terminal marker
Number of markers per packaging unit	Form of supply MultiCard
Operating temperature range	-40...100 °C
Operating temperature range, max.	100 °C
Operating temperature range, min.	-40 °C
Orientation of print	horizontal and vertical
Printed characters	Based on customer requirements (Please send M-Print PRO file)
Printing method	MC Laser
UL 94 flammability rating	V-2
Width	5 mm

### Connector markers

Pitch in mm (P)	5 mm
-----------------	------

### Classifications

ETIM 6.0	EC000761	ETIM 7.0	EC000761
ETIM 8.0	EC000761	ETIM 9.0	EC000761
ECLASS 9.0	27-14-11-37	ECLASS 9.1	27-14-11-37
ECLASS 10.0	27-14-11-37	ECLASS 11.0	27-28-11-01
ECLASS 12.0	27-28-11-01	ECLASS 13.0	27-28-11-01
ECLASS 14.0	27-28-11-01		

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

### Approvals

ROHS	Conform
------	---------

### Downloads

Catalogues	<a href="#">Catalogues in PDF-format</a>
------------	------------------------------------------


**Data sheet**

**MF-SI 10/5 MC SDR**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

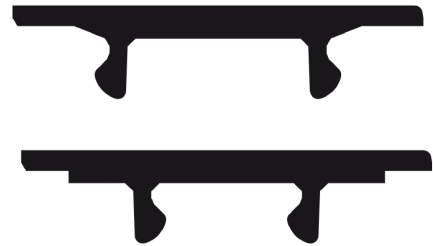

**Drawing**