

# HD Fusion Fiber Wall Mount Splice Enclosure

## specifications

---

The Fiber Optic Splice Enclosure shall house, organize, manage and protect cable to cable fusion splice connections. It shall accommodate large count fiber optic cables typically coming in from outside of the building transitioning to often smaller count cables within the data center. Splice trays can accommodate individual or ribbon fibers.



## technical information

---

**Part Numbers:** FWMHSSGS-3456 Fiber Wall Mount Hyperscale Splicing Solution Grey, with Split Doors - 3,456 Fibers  
FWMHSSGS-6912 Fiber Wall Mount Hyperscale Splicing Solution Grey, with Split Doors - 6,912 Fibers  
(Also available in White and Black - Change the G to a W for White or a B for Black)

**Mounting:**

- Wall-mountable using 5/16" or M8 hardware
- Overhead mounting using M10 threaded rod
- Freestanding on floor using M10 leveling legs

**Material:** Steel and plastic

**Part Dimensions:**

- FWMHSSGS-3456: 24"x36"x15" (WxHxD)
- FWMHSSGS-6912: 48"x36"x15" (WxHxD)

## key features and benefits

---

- Splice trays have the ability to rotate to be easily viewed, even when fully populated
- Work surface stores on door when not in use, and easily removable to install onto enclosure
- Integrated document holder
- Doors Remove/Install Without Tool
- Cable management has the ability to shift left/right to provide additional workspace if needed
- Cable plates are remove-able to provide additional access into enclosure during building
- Cable plates have the ability to rotate 180 degrees, and move top/bottom or side/side to find correct cable entry/exit points
- Enclosure structure and doors are integrally grounded/bonded
- Multiple enclosures can be ganged together horizontally/vertically to 'pay as you grow'
- Optional Storage box can be mounted to the top or bottom of enclosure to store unused fiber for future use
- Enclosure structure includes dust and rodent protection

## applications

---

As large fiber count cables enter the data center, a need for fiber distribution products to manage these cables has become apparent. Cables are spliced to take large fiber count cables and break them down into manageable fiber count cables and /or to transition them into cable types that are appropriate for use inside the data center. Data centers deploy several different solutions to accomplish this. Below are some application examples:


- Building entrance facility / Meet Me Room
- Data Center
- Hyperscale and Co-Location
- Telecommunications

# HD Flex™ Fiber Enclosures

## fiber capacity

Part Number	Description	Individual Fibers	Ribbon Fibers
<b>FWMHSSGS-3456</b>	Fiber Wall Mount Hyperscale Splicing Solution Grey, with Split Doors - 3,456 Fibers	1,152	3,456
<b>FWMHSSGS-6912</b>	Fiber Wall Mount Hyperscale Splicing Solution Grey, with Split Doors - 6,912 Fibers	2,304	6,912

(Also available in White and Black - Change the G to a W for White or a B for Black)

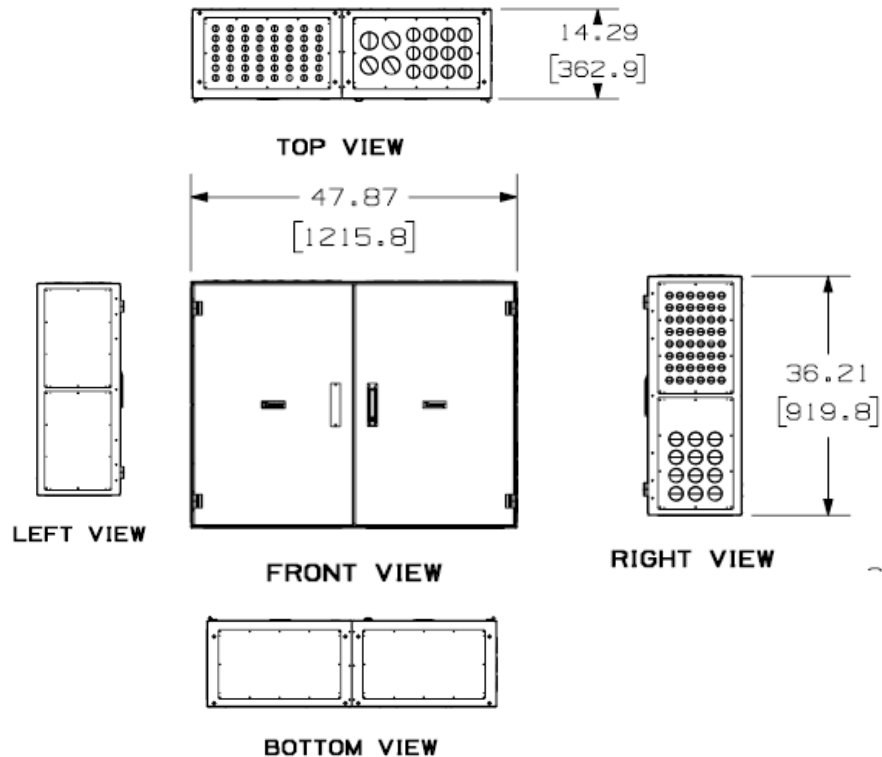

### Accessories To Be Purchased Separately

<b>FST144R</b>	Splicing tray for ribbon fibers up to 144
<b>FST48</b>	Splicing tray for single fiber up to 48
<b>FWMHSS-ICB</b>	Incoming Cable Bracket to secure/support cables and routing within our splicing enclosures
<b>FWMHSS-CG1321</b>	Cable gland 13mm - 21mm
<b>FWMHSS-CG2135</b>	Cable gland 21mm - 35mm
<b>FWMHSS-CG3448</b>	Cable gland 34mm - 48mm
<b>FBKSL-M05-KIT</b>	Breakout sleeve kit (24 sleeves) to secure the cable within the enclosure
<b>SE25PSC-TR0</b>	Fray Resistant Expandable Sleeveing
<b>FWMHSS-ICAK</b>	Incoming cable anchor kit
<b>ACGKX, ACGK</b>	Armored cable grounding, Armored Cable Grounding Kit, #16 Mech Clamp
<b>FWMHSSG-GROUND**</b>	Ground Kit
<b>FWMHSSG-STOR**</b>	Cable Storage Box

\*\* (Also available in White and Black - Change the G to a W for White or a B for Black)

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

<b>PANDUIT US/CANADA</b> Phone: 800.777.3300	<b>PANDUIT EUROPE LTD.</b> London, UK cs-emea@panduit.com Phone: 44.20.8601.7200	<b>PANDUIT SINGAPORE PTE. LTD.</b> Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575	<b>PANDUIT JAPAN</b> Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000	<b>PANDUIT LATIN AMERICA</b> Guadalajara, Mexico cs-la@panduit.com Phone: 52.33.3777.6000	<b>PANDUIT AUSTRALIA PTY. LTD.</b> Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020
---	---	---	---	--	--

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT**®

© 2020 Panduit Corp.  
ALL RIGHTS RESERVED.  
FBSP92--WW-ENG  
9/2020