

FEATURES & SPECIFICATIONS

INTENDED USE — Recessed housing rated IC or Non-IC. For new construction only.

Approved for all ceiling and wiring types.

Approved for direct burial in insulation.

CONSTRUCTION — Air-Tight standard. Tested to meet current energy codes.

Aluminum housing with galvanized steel pan.

Galvanized bar hangers span up to 24" o.c. and feature built in nailer and integral T-bar clips. Two locking screws hold fixture in position.

Galvanized steel junction box with four built-in Romex clamps; five 1/2" and two 3/4" nominal knockouts with slots for pryout. Rated for through branch wiring.

Maximum 4 (2 in, 2 out) No 12 AWG conductors. Rated for 90° C.

Ground wire provided.

Removable J-box doors for easy access.

Trim retention (clips): Retaining clips riveted to top of reflector hold trim inside housing.

Trim retention (TOR): Two-side mounted torsion springs on the trim and 2 receiving brackets in the can ensure a consistently tight fit with the ceiling.

ELECTRICAL — Durable medium base porcelain socket with nickel plated copper alloy screw shell and contact.

Socket clips to top of housing to prevent paint overspray in socket screw shell.

Socket attaches to reflector to ensure proper and consistent lamp position.

Thermal protection provided against improper lamp usage.

120 volts only.

INSTALLATION — Air-Tight housing suitable for air-tight installations.

2 x 8 wood joist or T-bar installation.

Expandable bar hangers allow for off center mounting in wood joist or T-bar ceilings.

Length of 25/4" maximum 13 1/4" minimum or cut to fit 9" on center joist construction.

Vertical adjustment of housing allows for flush mounting with ceiling face.

Suitable to ceilings up to 1-1/2" thick.

LISTINGS — UL Listed to US and Canadian safety standards.

Damp location listing. (See trim selection for wet location listing).

WARRANTY — 1-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.


Specifications subject to change without notice.

Catalog Number
Notes
Type

6" Housing

L7X

INCANDESCENT
IC/Non-IC
New Construction

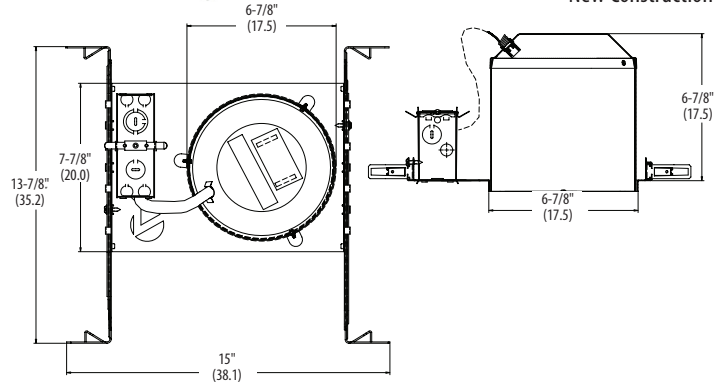

Specifications

Height: 6-7/8 (17.5)

Length: 15 (38.1)

Width: 13-7/8 (35.2)

Ceiling cutout: 7 (17.8)

All dimensions are inches (centimeters) unless otherwise specified.

ORDERING INFORMATION For shortest lead times, configure product using **bolded options**.

Example: L7X R6















Series	Options	Packaging
L7X	Shipped installed in fixture PHC Poke-home wire connectors GSKT Foam gasketing, aids in air-tight installation	R6 Resale pack of six U Unit (non-stock)

Accessories: Order as separate catalog number.	
ATK6 R6	6" Air-tight trim kit
HS6875	6-7/8" hole saw

Notes

See trim summary on reverse side for maximum wattages.

L7X 6" New Construction Housing

Description Catalog number	Maximum wattage ¹	Description Catalog number	Maximum wattage ¹	Description Catalog number	Maximum wattage ¹	Description Catalog number	Maximum wattage ¹	
General/Task				Shower/Closet Lens Narrow Flange				
Open Narrow Flange 702 PF 702A 702A PFMW TOR	White with plastic flange Clear diffuse Clear diffuse, matte white, plastic flange Clear specular Black specular	Baffle Narrow Flange 7B2 TOR 7B2 TRMW TOR 7B2W TOR 7B2W PF TOR 7B2MW TOR 7B2BN TOR 7B2ORB TOR	Black Black, matte white flange White White plastic flange Matte white Brushed nickel Oil-rubbed bronze	Regressed Eyeball Wide Flange 7RE1	White	7LD1 7LD1 PF 7LD2 PF	Drop opal metal flange Drop opal plastic* Drop prismatic plastic*	
702AZ 702BLZ					65 BR30 50 PAR30			
IC/Non-IC		IC/Non-IC		Wallwash Narrow Flange 7W1	White	IC	40 A19	
	65 BR30 75 PAR30		65 BR30 75 PAR30			6LD1 6LD2 6LF1 6LF2	Shower/Closet Lens Narrow Flange Drop opal plastic* Drop prismatic plastic* Flush opal plastic* Flush prismatic plastic*	
Open Narrow Flange 702 TOR 702MW TOR 702BN TOR 702ORB TOR	White* Matte white Brushed nickel Oil-rubbed bronze	Baffle Wide Flange 7B3 TOR 7B3W TOR	Black White	Non-IC		Non-IC	60 A19	
				Pinhole Narrow Flange 6S1	White		60 A19 65 BR30 50 R20/PAR20	
	65 BR30 75 PAR30		65 BR30 75 PAR30					
IC/Non-IC		Baffle Narrow Flange 7B5 7B5W	Black White	Non-IC		6LD3 6LDB3 6LF3 6LFB3 6L4 6LB4	Glass Lens Narrow Flange Drop opal white splay Drop opal black baffle Flush white white splay Flush white black baffle Fresnel white splay Fresnel black baffle	
	65 BR30 75 PAR30						75 A19	
Open Wide Flange 703 TOR	White	Non-IC	120 BR40 150 PAR38	Lens/Wet Location²				
	65 BR30 75 PAR30			WETLite™				
IC/Non-IC				6H20 TOR White 6H20ORB TOR Oil-rubbed bronze 6H20BN TOR Brushed nickel				
								
Open Narrow Flange 705 705 PF 705AZ	White White plastic flange Clear specular	Accent/Adjustable		IC/Non IC				75 PAR38
		Eyeball Wide Flange 7E1 TOR 7E1MW TOR 7E1BN TOR 7E1ORB TOR 7E1BZA TOR						
	120 BR40 120 PAR38	White Matte white Brushed nickel Oil-rubbed bronze Antique bronze						
Non-IC								
		65 BR30 75 PAR30						
		IC/Non-IC						

* For plastic flange add suffix PF

Notes

- Maximum wattage listed. Lower wattage lamps may be used.
- Lens trims and WETLites™ are wet location listed. All others are damp location.

Additional Notes

- Shallow trims may be used for lower lamp position. See C Series Trims.
- 6 C series trims also compatible options.
- See LED modules on page 2 and page 3.

REALITY™ ENERGY STAR® (ESL) Open Narrow Flange LED Module (Wet location)



Example: REAL6 D6MW ESL 1000L 35K .60SC L7X¹

ORDERING INFORMATION For shortest lead times, configure products using **bolded options**.

Series/Finish		ESL	Lumen output ²		Color temperature		Distribution		Voltage		Options	
Series	Finish	ESL	600L	8W, 600 lumens	27K	2700 K	.60SC	.60 spacing criteria	(blank)	120V	PFMW	Matte white plastic flange ring
REAL6 D6	6" ENERGY STAR retrofit module	ENERGY STAR® qualified	1000L	11W, 1000 lumens	30K	3000 K	.90SC	.90 spacing criteria			PFBL	Black plastic flange ring
	A				35K	3500 K					ISH	Insect shield
	AZ				40K	4000 K						
	BN											
	BLZ											
	BZA											
	ORB											
	WT											

Notes

- L7X housing ordered on a separate line.
- Total system delivered lumens.

L7X 6" New Construction Housing

P Series Open and Baffle Wide Flange LED Modules (Wet Location)



Example: 6BP TRMW LED 27K 90CRI L7X¹

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Series/Finish	Lamp	CCT / CRI / W / Lumens ²	Voltage
6BPMW	LED	(blank) 3000 K / 83 CRI / 8.9W / 620L	(blank) 120V
6BP TRMW		27K 90CRI 2700 K / 93 CRI / 11.2W / 600L	
6BPBN		30K 90CRI 3000 K / 93 CRI / 11.2W / 600L	
6BPORB		40K 90CRI 4000K/92CRI/9.9W/650L	
60PA	HL LED	(blank) 3000 K / 83 CRI / 15.2W / 950L	
60PAZ		27K 90CRI 2700 K / 93 CRI / 16.5W / 860L	
60PA TRMW		30K 90CRI 3000 K / 93 CRI / 16.5W / 860L	
60PAZ TRMW		40K 90CRI 4000K/92CRI/16.4W/950L	

Notes

- L7X housing ordered on a separate line.
- Total system delivered lumens.

LED Gimbal Module (Damp location)



Example: 6G1MW LED L7X¹

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Series/Finish	Lamps	CCT / CRI / W / Lumens ³	Voltage
6G1	LED		
6G1 6" Gimbal Module	LED	(blank) 3000k / 83CRI / 10.8W / 620L 27K 90CRI 2700K / 91CRI / 11W / 680L 30K 90CRI 3000K / 91CRI / 10.3W / 790L 40K 90CRI 4000K / 94CRI / 10.5W / 820L	(blank) 120V

Notes

- L7X housing ordered on a separate line.
- Available in 30K 83CRI only.
- Total system delivered lumens.

E Series Baffle Wide Flange LED Modules (Wet Location)



Example: 65BEMW LED 27K L7X¹

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Series/Finish	Lamp	CCT / CRI / W / Lumens ²	Voltage
65BEMW 5" / 6" Baffle LED module, matte white	LED	27K 2700 K / 82CRI / 11.9W / 640L 30K 3000 K / 82CRI / 11.9W / 687L 40K 4000K / 82CRI / 11.9W / 711L 27K 90CRI 2700K / 93CRI / 10.3W / 650L 30K 90CRI 3000K / 93CRI / 10.1W / 690L	(blank) 120V

Notes

- L7X housing ordered on a separate line.
- Total system delivered lumens.



L7X