



### Main

Range of Product	Lexium 32i
Product or Component Type	Connector module
Accessory / separate part category	Connection accessories
Electrical Connection	Industrial connector

### Complementary

Product compatibility	Control unit LXM32i EtherCAT Control unit LXM32i Profinet
Accessory / separate part destination	Motor BMI with drive control unit Lexium 32i
Range Compatibility	Lexium 32i
Communication interface	EtherCAT Profinet
Input/output type	4 discrete inputs
Discrete input logic	Source
Safety Function	STO (safe torque off)
Net Weight	0.49 lb(US) (0.22 kg)

### Ordering and shipping details

Category	18289-LEXIUM INTEGRATED DRIVES ACC
Discount Schedule	PC56
GTIN	3606480610837
Returnability	No
Country of origin	DE

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.23 in (8.200 cm)
Package 1 Width	4.65 in (11.800 cm)
Package 1 Length	6.77 in (17.200 cm)
Package 1 Weight	7.83 oz (222.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	12
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	7.23 lb(US) (3.280 kg)


## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------

Connection of I/O Module for EtherCAT with Industrial Connectors

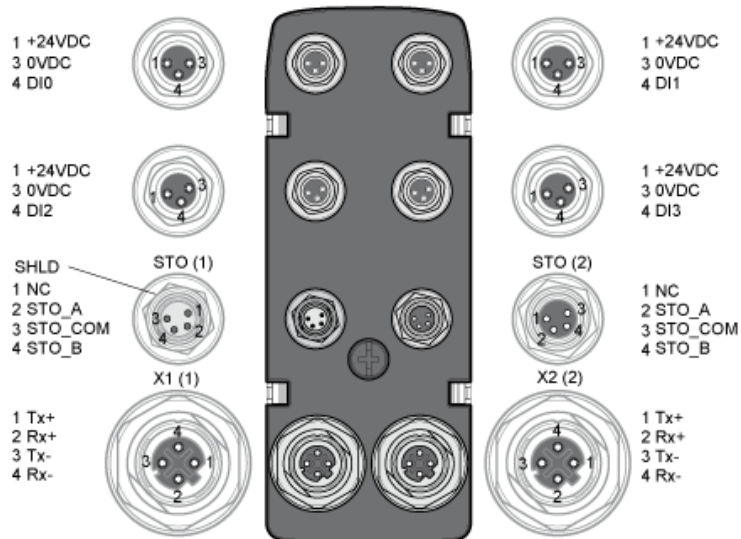

- (1) IN  
(2) OUT

Signal	Meaning
+24VDC	24 V signal power supply
0VDC	Reference potential to +24VDC
DI0	Digital input 0
DI1	Digital input 1
DI2	Digital input 2
DI3	Digital input 3
STO_A	Safety function STO
STO_COM	Reference potential for safety function STO
STO_B	Safety function STO
SHLD	Shield (grounded internally)
Tx+	Ethernet transmit signal +
Tx-	Ethernet transmit signal -
Rx+	Ethernet receive signal +
Rx-	Ethernet receive signal -
NC	Not connected