

XVC1M1HK

Harmony XVC, Monolithic precabled tower light, plastic, red, Ø100, base mounting, steady or flashing, with siren, IP54, 100...240 V AC



Main

Range of Product	Harmony XVC1
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	1 illuminated unit
Sound signalling	Siren
Mounting diameter	3.94 in (100 mm)
Component name	XVC
Light source	LED steady or flashing red
[Us] rated supply voltage	100...240 V
Supply circuit type	AC
Noise level	0...102 dB continuous or intermittent tone)1 m

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover
Product mounting	On base
Cable cross section	0.00 In ² (0.33 mm ²) 0.00 in ² (0.83 mm ²)
AWG Gauge	AWG 22 AWG 18
Cable length	19.69 in (500 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current Consumption	235 mA
Flashing frequency	0.7...3 Hz
Net Weight	3.70 lb(US) (1.68 kg)
Height	11.54 in (293 mm)

Environment

Standards	IEC 60947-5-1 IEC 60947-1
Product Certifications	UL
Protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature for Operation	-4...122 °F (-20...50 °C)
Electrical shock protection class	Class I IEC 61140
IP degree of protection	IP54 IEC 60529

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.87 in (20.0 cm)
Package 1 Width	8.27 in (21.0 cm)
Package 1 Length	17.52 in (44.5 cm)
Package 1 Weight	5.32 lb(US) (2.414 kg)

Unit Type of Package 2	S06
Number of Units in Package 2	6
Package 2 Height	29.53 in (75.0 cm)
Package 2 Width	23.62 in (60.0 cm)
Package 2 Length	31.50 in (80.0 cm)
Package 2 Weight	58.23 lb(US) (26.414 kg)


Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Pre-assembled and Pre-wired Tower Light with Siren

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

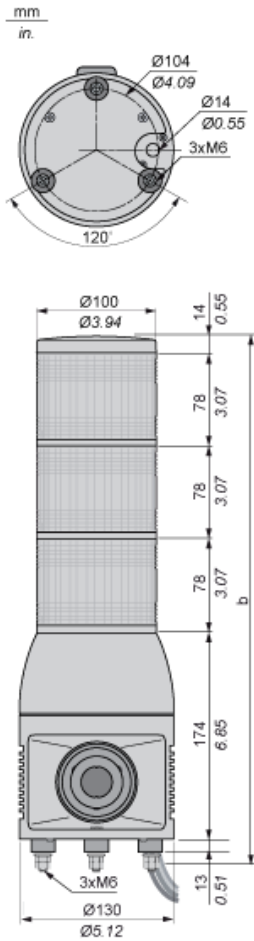

No. of illuminated units	b in mm	b in in.
1	293	11.54
2	371	14.61
3	449	17.68

Pre-assembled and Pre-wired Tower Light with Siren

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

