

Product data sheet

Specifications



Regulated Power Supply, 380...500V AC, 48V, 20A, 3 phases, Universal

ABLU3A48200

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon Power Supply
Product or Component Type	Power supply
Power supply type	Regulated switch mode
Variant option	Universal
Enclosure Material	Metal
Nominal input voltage	380...500 V AC three phase
Rated power in W	960 W
Output voltage	48 V DC
Power supply output current	20 A
Permissible temporary current boost	1.5 x In for 5 seconds)

Complementary

Efficiency at full load	320...575 V AC 3 phase
Nominal network frequency	50...60 Hz
Network system compatibility	TN TT IT
Maximum leakage current	2 mA 500 V AC
Input protection type	Integrated fuse (not interchangeable) 3.15 A External protection (recommended)
Inrush current	35 A 380 V 35 A 500 V
Power factor	0.90 at 380 V AC 0.90 at 500 V AC
Efficiency	95 % 380 V AC 95 % 500 V AC
Output voltage adjustment	48...56 V
Power dissipation in W	49 W
Current consumption	< 1.9 A 380 V AC < 1.7 A 500 V AC
Turn-on time	< 2 s
Holding time	> 20 ms 380 V AC > 20 ms 500 V AC
Startup with capacitive loads	200000 µF
Residual ripple	< 200 mV

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Meantime between failure [MTBF]	912400 h at 77 °F (25 °C), full load conforming to SR 332 382500 h at 131 °F (55 °C), 80 % load conforming to SR 332
Output protection type	Against overload and short-circuits, protection technology: manual or automatic reset by switch Against over temperature, protection technology: automatic reset Against overvoltage, protection technology: manual reset
Connections - terminals	Screw connection 4 x 10 mm², 12 AWG...8 AWG) with wire end ferrule output Screw connection 4...16 mm², 12 AWG...6 AWG) without wire end ferrule output Screw connection 0.75...6 mm², 18 AWG...10 AWG) without wire end ferrule input Screw connection 0.75...4 mm², 18 AWG...12 AWG) with wire end ferrule input Cage clamp 0.2...1.5 mm², 22 AWG...16 AWG) without wire end ferrule diagnostic relay Cage clamp 0.2...1.5 mm², 22 AWG...16 AWG) without wire end ferrule shut down input Cage clamp 0.2...0.75 mm², 22 AWG...18 AWG) with wire end ferrule diagnostic relay Cage clamp 0.2...0.75 mm², 22 AWG...18 AWG) with wire end ferrule shut down input
Line and load regulation	< 0.17 % network 100 % load in line at 77 °F (25 °C) < 0.6 % +/- 0.5 % network 100 % load at 77 °F (25 °C) for single mode 4 % network 150 % load at 77 °F (25 °C) for parallel mode
Status LED	1 LED (green and red) product status
Depth	5.07 in (128.7 mm)
Height	4.9 in (124 mm)
Width	4.3 in (110 mm)
Product Weight	5.05 lb(US) (2.29 kg)
Output coupling	Single/parallel by switch
Marking	CE UKCA
Mounting support	Top hat type TH35-15 rail IEC 60715 Top hat type TH35-7.5 rail IEC 60715 Double-profile DIN rail
Supply	SELV IEC 60950-1 SELV IEC 60204-1 SELV IEC 60364-4-41
Dielectric strength	4000 V AC with input to output 2000 V AC with input to ground 1500 V AC with output to ground 4000 V AC with input to diagnostic relay 500 V AC with output to diagnostic relay 1500 V AC with diagnostic relay to ground 4000 V AC with shutdown input to input 1500 V AC with shutdown input to ground with shutdown input not isolated from output
Shutdown input	Non isolated input, dry contact 0.3 mA 4 V
Diagnostic relay	Electromechanical relay 1000.0 mA 30 V
Service life	10 year(s) 104 °F (40 °C) 80 % load
Overvoltage category	III II

Environment

Standards	IEC 62368-1 EN/IEC 61204-3 IEC 61000-6-1 IEC 61000-6-2 IEC 61000-6-3 IEC 61000-6-4 IEC 61000-3-2 EN 61000-3-3 UL 62368-1 CSA C22.2 No 62368-1 CSA C22.2 No. 107.1
Product certifications	CE CUL Listed CUL Recognized RCM CB Scheme EAC KC UKCA CURus
Operating altitude	< 5000 m overvoltage category III overvoltage category II
Shock resistance	150 m/s² 11 ms
IP degree of protection	IP20
Ambient air temperature for operation	-13...131 °F (-25...55 °C) without current derating mounting position A < 6561.68 ft (2000 m) 131...158 °F (55...70 °C) with current derating of 3.3 % per °C mounting position A < 6561.68 ft (2000 m)
Electrical shock protection class	Class I
Pollution degree	2
Vibration resistance	3.5 mm (f= 3...11.9 Hz) conforming to IEC 60068-2-6 20 m/s² (f= 11.9...150 Hz) conforming to IEC 60068-2-6
Electromagnetic immunity	Immunity to electrostatic discharge - test level: 8 kV (contact discharge) conforming to IEC 61000-4-2 Immunity to electrostatic discharge - test level: 15 kV (air discharge) conforming to IEC 61000-4-2 Immunity to conducted RF disturbances - test level: 15 V/m (80 MHz...2 GHz) conforming to IEC 61000-4-3 Immunity to conducted RF disturbances - test level: 5 V/m (2...2.7 GHz) conforming to IEC 61000-4-3 Immunity to conducted RF disturbances - test level: 5 V/m (2.7...6 GHz) conforming to IEC 61000-4-3 Immunity to fast transients - test level: 4 kV (on input-output) conforming to IEC 61000-4-4 Surge immunity test - test level: 4 kV (between power supply and earth) conforming to IEC 61000-4-5 Surge immunity test - test level: 3 kV (between phases) conforming to IEC 61000-4-5 Immunity to conducted RF disturbances - test level: 15 V (0.15...80 MHz) conforming to IEC 61000-4-6 Immunity to magnetic fields - test level: 30 A/m (50...60 Hz) conforming to IEC 61000-4-8 Immunity to voltage dips conforming to IEC 61000-4-11 Disturbing field emission conforming to EN 55016-2-3 Limits for harmonic current emissions conforming to IEC 61000-3-2 conforming to EN 55016-1-2 conforming to EN 55016-2-1
Electromagnetic emission	Conducted emissions IEC 61000-6-3 Radiated emissions IEC 61000-6-4

Ordering and shipping details

Category	US1CP1222524
Discount Schedule	CP12
GTIN	3606482185289
Returnability	Yes

Country of origin	IN
-------------------	----

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	6.102 in (15.500 cm)
Package 1 Width	8.661 in (22.000 cm)
Package 1 Length	8.268 in (21.000 cm)
Package weight(Lbs)	6.614 lb(US) (3.000 kg)
Unit Type of Package 2	S03
Number of Units in Package 2	2
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	14.670 lb(US) (6.654 kg)
Unit Type of Package 3	P12
Number of Units in Package 3	48
Package 3 Height	41.339 in (105.000 cm)
Package 3 Width	31.496 in (80.000 cm)
Package 3 Length	47.244 in (120.000 cm)
Package 3 Weight	382.934 lb(US) (173.696 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

EU RoHS Directive

[Compliant By Exemption](#)

REACH Regulation

[Reference contains Substances of Very High Concern above the threshold](#)

Use Longer



Lifetime extension

Repair

No

Use Again



Repack and remanufacture

Circularity Profile

[End of Life Information](#)

Take-back

No


WEEE Label



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Dimensions Drawings

Dimensions

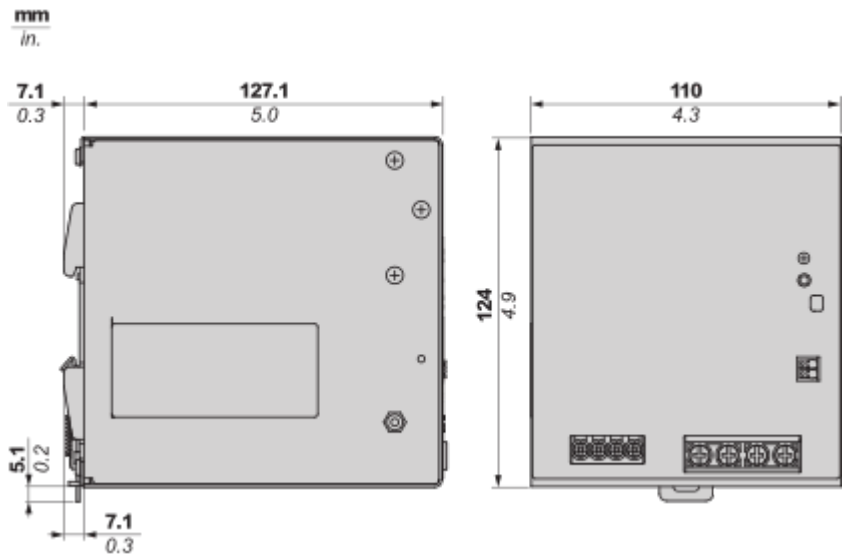


Connections and Schema

Wiring

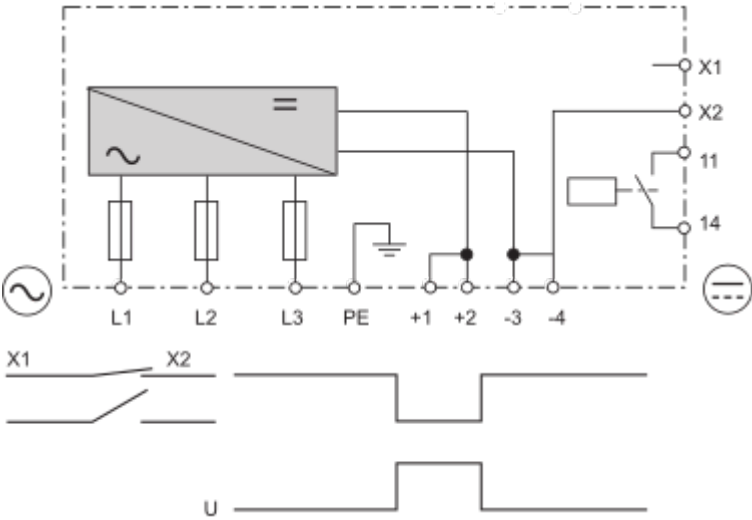

U : Out

Block Diagram

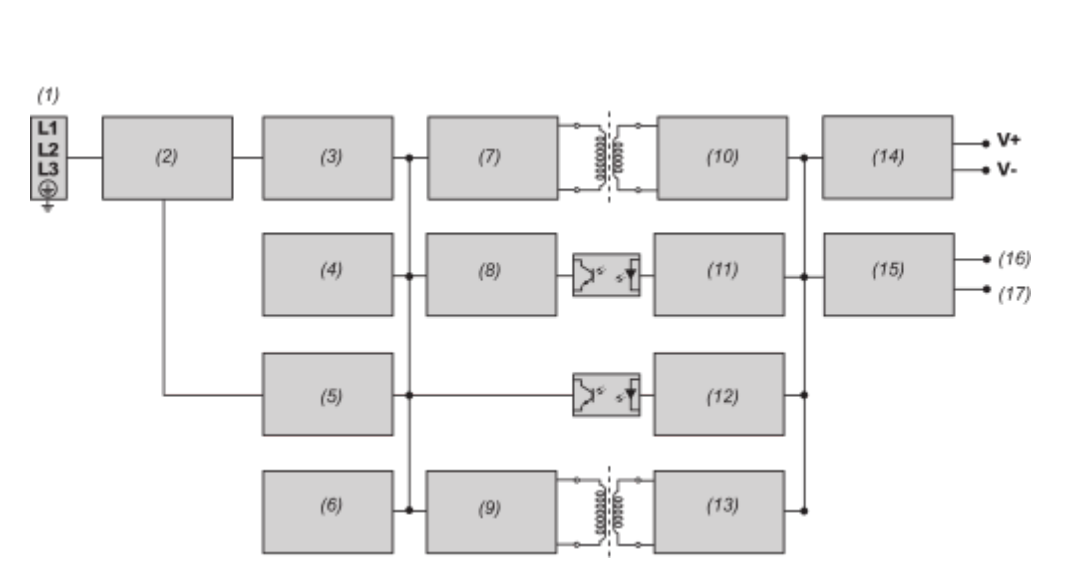


- (1) : Input
- (2) : EMI filter
- (3) : PI filter, inrush current circuit, PFC circuit
- (4) : PFC controller
- (5) : Input monitoring
- (6) : Housekeeper control
- (7) : Primary power stage
- (8) : LLC controller
- (9) : Housekeeper primary circuit
- (10) : Secondary power stage
- (11) : Secondary controller, voltage & current controller, SR controller, OCP & OCP
- (12) : Secondary MCU
- (13) : Housekeeper secondary circuit
- (14) : Output filter
- (15) : LED & relay controller
- (16) : DC OK LED
- (17) : DC OK relay contact


Mounting and Clearance

Mounting

Mounting Position

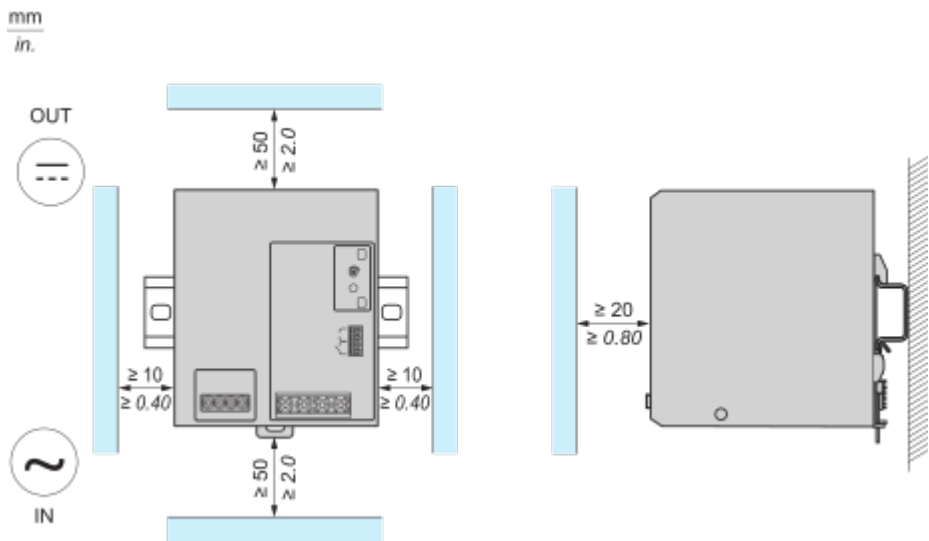


Incorrect Mounting

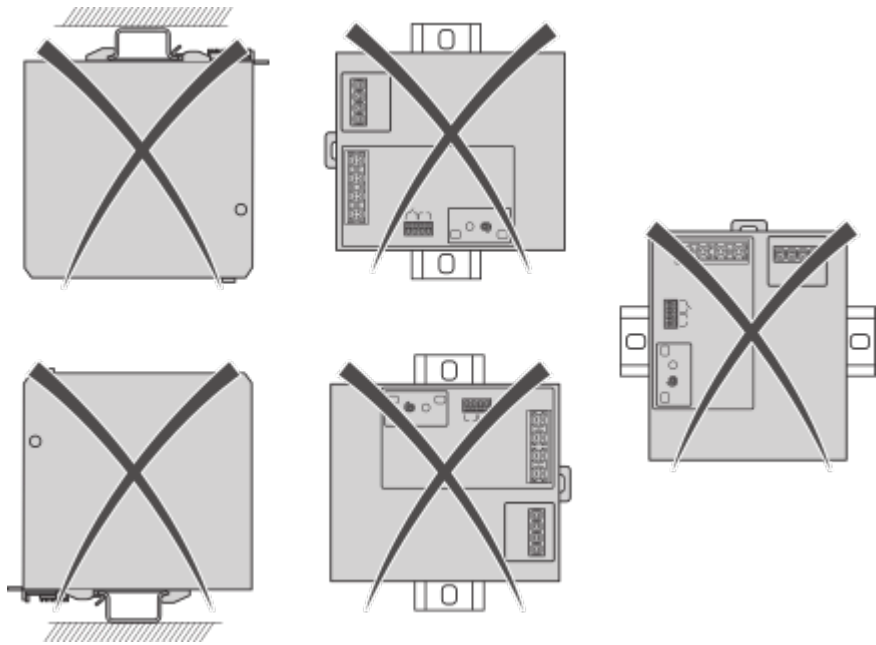


Performance Curves

Performance Curve

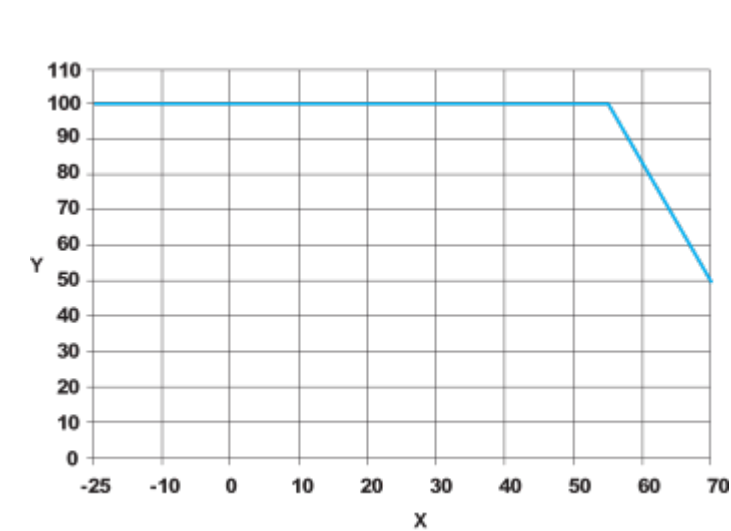

X : Surrounding Air Temperature (°C)
Y : Percentage of Maximum Load (%)

Overvoltage Protection Behavior

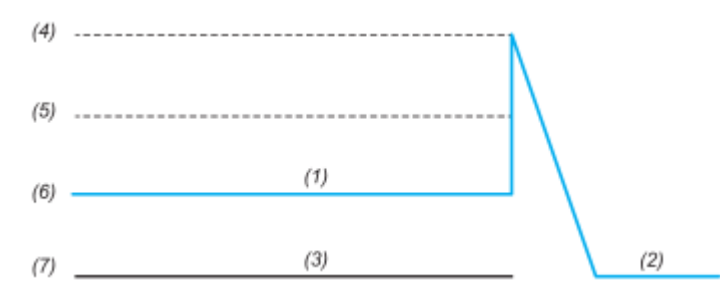

Overvoltage range : 54...60 VDC, Latch mode
(1) : Variable output voltage range
(2) : Latch
(3) : Typical overvoltage condition as seen at the output
(4) : Maximum overvoltage protection level
(5) : Overvoltage protection
(6) : Nominal output voltage
(7) : Zero output

Image of product / Alternate images

Alternative



