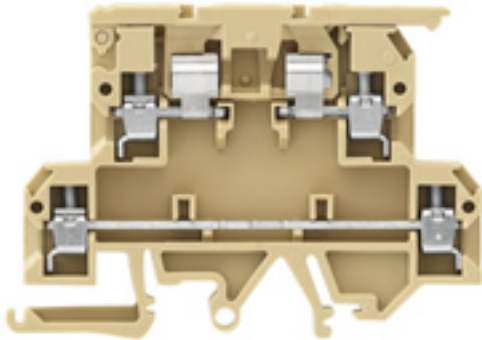


**KDKS1EN/SMT 10-60VAC/DC BFI H+**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

**Product image**

Similar to illustration

In some applications it is useful to protect the feed through connection with a separate fuse. Fuse terminal blocks are made up of one terminal block bottom section with a fuse insertion carrier. The fuses vary from pivoting fuse levers and pluggable fuse holders to screwable closures and flat plug-in fuses.

**General ordering data**

Version	Fuse terminal, dark beige, 4 mm <sup>2</sup> , 6.3 A, 60 V, Number of connections: 4, Number of levels: 2, TS 32, TS 35, Wemid, G-Si. 5 x 20
Order No.	<a href="#">2812470000</a>
Type	KDKS1EN/SMT 10-60VAC/DC BFI H+
GTIN (EAN)	4064675295945
Qty.	50 pc(s).
Local product	Only available in certain countries

Creation date November 26, 2024 11:46:47 AM CET

Catalogue status 26.11.2024 / We reserve the right to make technical changes.

## KDKS1EN/SMT 10-60VAC/DC BFI H+

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### General ordering data

Local product	Only available in certain countries
---------------	-------------------------------------

### Dimensions and weights

Depth	55.7 mm	Depth (inches)	2.193 inch
Height	73.5 mm	Height (inches)	2.894 inch
Width	8 mm	Width (inches)	0.315 inch
Net weight	99 g		

### Temperatures

Storage temperature	-25 °C...55 °C
---------------------	----------------

### Material data

Material	Wemid	Colour	dark beige
----------	-------	--------	------------

### System specifications

End cover plate required	Yes	Number of potentials	2
Number of levels	2	Number of clamping points per level	2
Number of potentials per tier	1	Rail	TS 32, TS 35
PE function	No		

### Additional technical data

Open sides	right	Type of mounting	Snap-on
------------	-------	------------------	---------

### Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm	Connection cross-section, stranded, max.	4 mm <sup>2</sup>
Connection cross-section, stranded, min.	1.5 mm <sup>2</sup>	Connection direction	on side
Number of connections	4	Stripping length	9 mm
Tightening torque, max.	1 Nm	Tightening torque, min.	0.5 Nm
Wire connection cross section AWG, max.	AWG 12	Wire connection cross section AWG, min.	AWG 22
Wire connection cross section, finely stranded, max.	4 mm <sup>2</sup>	Wire connection cross section, finely stranded, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	4 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	4 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, solid core, max.	4 mm <sup>2</sup>	Wire connection cross-section, solid core, min.	0.5 mm <sup>2</sup>

### Fuse terminals

Cartridge fuse	G-Si. 5 x 20	Fuse holder (cartridge holder)	Pivoting
----------------	--------------	--------------------------------	----------

## KDKS1EN/SMT 10-60VAC/DC BFI H+

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### General

Rail	TS 32, TS 35	Standards	IEC 60947-7-1, IEC 60947-7-3
Wire connection cross section AWG, max.	AWG 12	Wire connection cross section AWG, min.	AWG 22

### Rating data

Rated cross-section	4 mm <sup>2</sup>	Rated voltage	60 V
Rated voltage to adjoining terminal	500 V	Rated DC voltage	60 V
Rated current	6.3 A	Standards	IEC 60947-7-1, IEC 60947-7-3
Rated impulse withstand voltage	6 kV	Power loss in accordance with IEC 60947-7-x	1.02 W
Pollution severity	3	Surge voltage category	III

### Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ETIM 8.0	EC000899	ETIM 9.0	EC000899
ECLASS 9.0	27-14-11-16	ECLASS 9.1	27-14-11-16
ECLASS 10.0	27-14-11-16	ECLASS 11.0	27-14-11-16
ECLASS 12.0	27-14-11-16	ECLASS 13.0	27-25-01-13
ECLASS 14.0	27-25-01-13		

### Environmental Product Compliance

RoHS Compliance Status	Compliant
REACH SVHC	No SVHC above 0.1 wt%

### Important note

Product information	The voltage depends on the selected fuse element or the selected indicator light
---------------------	--

### Approvals

ROHS	Conform
------	---------

### Downloads

Catalogues	<a href="#">Catalogues in PDF-format</a>
------------	--