

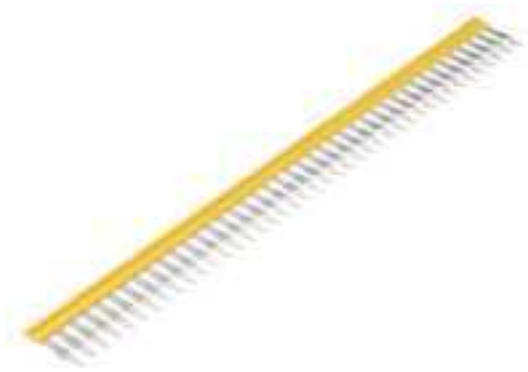
ZQV 4N/41**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

General ordering data

Version	W-Series, Cross-connector, 32 A
Order No.	1758270000
Type	ZQV 4N/41
GTIN (EAN)	4032248169801
Qty.	10 pc(s).
Delivery status	Discontinued
Available until	2021-12-31
Alternative product	2883810000

Creation date November 26, 2024 12:16:04 PM CET

Catalogue status 26.11.2024 / We reserve the right to make technical changes.

ZQV 4N/41**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	25.7 mm	Depth (inches)	1.012 inch
Height	248.8 mm	Height (inches)	9.795 inch
Width	2.8 mm	Width (inches)	0.11 inch
Net weight	2 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

Material data

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

System specifications

Version	For the terminals
---------	-------------------

Additional technical data

Type of fixing	Plugged
----------------	---------

Cross-connector

Rated current, 2-pole	32 A	Rated current, multi-pole	32 A
Type	Cross-connector		

Dimensions

Pitch in mm (P)	6.1 mm
-----------------	--------

General

Number of poles	41
-----------------	----

Rating data

Rated current	32 A
---------------	------

Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ETIM 9.0	EC000489
ECLASS 9.0	27-14-11-40	ECLASS 9.1	27-14-11-40
ECLASS 10.0	27-14-11-40	ECLASS 11.0	27-14-11-40
ECLASS 12.0	27-14-11-40	ECLASS 13.0	27-25-03-03
ECLASS 14.0	27-25-03-03		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

ZQV 4N/41

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Important note

Product information	Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used
---------------------	--

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	CAD data – STEP
User Documentation	Storage Conditions Terminal Blocks User Manual ZQV 2.5
Catalogues	Catalogues in PDF-format