


SH Series


100 AMP - 600 VOLTS Shallow



CATALOGUE #	DESCRIPTION	WEIGHT
SH400PW	c/w hub closure plate, overhead/underground	5 lbs.
SH400JW	Overhead c/w 1 1/4" hub	5 lbs.
SH400BW	Overhead twin hub opening c/w 2 - 1 1/4" hubs	6 lbs.
SH400BP	Overhead twin hub opening c/w closure plates	5 lbs.
SH400MW	c/w mast coupler	5 lbs.
SH400TW	Underground - blank top	5 lbs.
SH400KO	Overhead with knockout on top (indoor)	5 lbs.

- CSA weatherproof enclosure 3
- Approved conductor range No.6 - No.2CU
- Copper only
- Insulated neutral available upon request

- Field adaptable Accessories
- 5th Jaw at 9 O'clock - SXX503

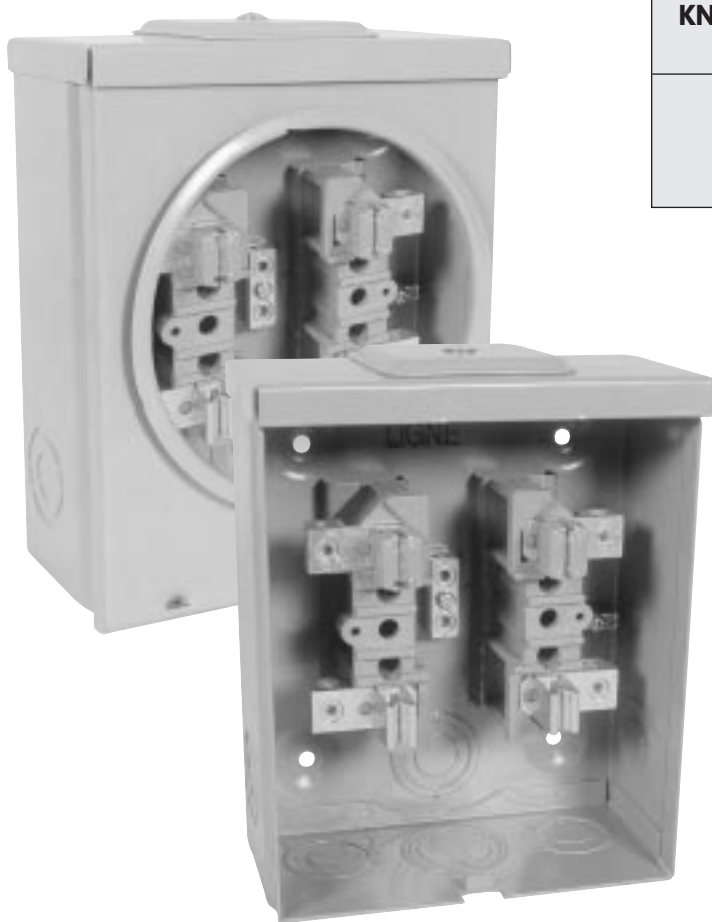

KNOCKOUT CODE	CONDUIT SIZE
A	1/2", 1", 1 1/4"
B	1", 1 1/4"
C	1", 1 1/4", 1 1/2"

