CMPB-L Series

Miniature LED battery unit

FEATURES

- Fully adjustable LED glare-free lens
- 3.6V 2W long life LED light source
- Universal voltage input capability 120V, 277V and 347V
- Automatic, temperature compensated, pulse type charger
- Low voltage disconnect prevents over discharge of battery
- Automatic brownout protection
- Sealed maintenance-free 3.6V nickel-cadmium battery offering 120 minutes of emergency lighting
- Battery lock-out prevents discharge during installation
- Red LED charger monitor
- Momentary test switch allows for quick operational check
- Injection-molded thermoplastic ABS housing
- Rear keyhole slots and universal knock-outs to mount to any standard 4" junction box
- Injection-molded thermoplastic ABS housing
- Fast and easy installation with snap-together design
- Ceiling or wall mount installation
- Suitable for damp locations
- Use in 5°C-30°C ambient temperature
- Meets CSA C22.2 no.141-15
- Comes standard with one (1) year warranty

See warranty details at: www.tnb.ca/en/brands/lumacell

DIMENSIONS

Dimensions are approximate and subject to change.

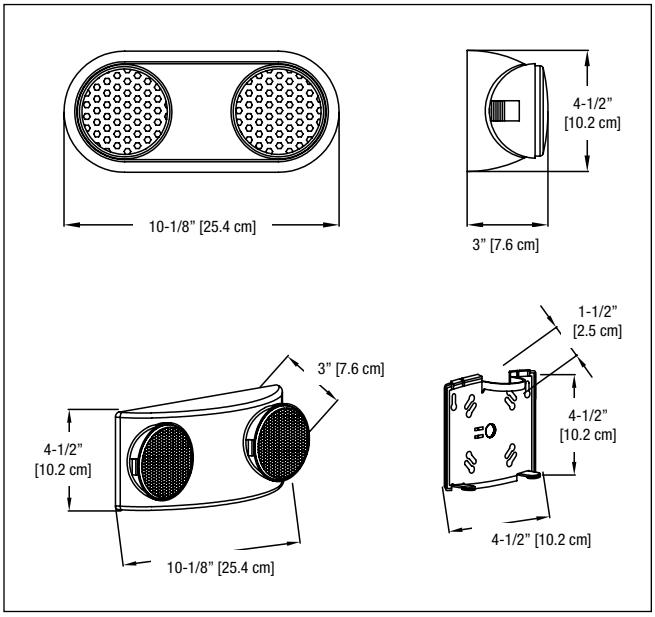

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS			
		WATTAGE	CURRENT	EFFICIENCY
CM-PB	120V, 50/60 Hz	1.6W	0.012A	0.96P
	277V, 50/60 Hz	1.8W	0.007A	0.92P
	347V, 50/60 Hz	2.4W	0.007A	0.92P

CIRCUITRY

Emergency duration	2 Hours
Recharge time	24 Hours
Light Source	Ultra bright LED
Color temperature	6500K- 7500K
Ni-Cd Battery	3.6V 2000mAh SC

ORDERING INFORMATION

SERIES	VOLTAGE
CM-PB -L	**Blank**= 120/347VAC

EXAMPLE: CM-PB-L