

# Product data sheet

## Characteristics

# XVC4B1K

Monolithic precabled tower light, Harmony XVC, plastic, red, 40mm, base mounting, steady, IP54, 24V AC DC



### Main

Range of Product	Harmony XVC4
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	1 illuminated unit
Sound signalling	Without
Mounting diameter	1.57 in (40 mm)
Component name	XVC
Device short name	XVC
Light source	LED steady red
Supply circuit type	AC/DC

### Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover
Mounting Location	On base
Product mounting	On base
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
Cable cross section	0.00 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG Gauge	AWG 22
Cable length	19.69 in (500 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current Consumption	25 mA
Flashing frequency	1 Hz
Net Weight	0.22 lb(US) (0.1 kg)
Height	3.96 in (100.5 mm)

### Environment

Standards	IEC 61000-6-2 IEC 61000-6-3
Product Certifications	UL
Protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature for Operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class II IEC 61140
Overvoltage category	Class II IEC 61140
IP degree of protection	IP54 flat surface installation IEC 60529

### Ordering and shipping details

Category	22617-XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901558019
Returnability	No
Country of origin	ID

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.50 in (6.35 cm)
Package 1 Width	3.00 in (7.62 cm)
Package 1 Length	18.50 in (46.99 cm)
Package 1 Weight	0.57 lb(US) (0.26 kg)
Unit Type of Package 2	S04
Number of Units in Package 2	12
Package 2 Height	11.81 in (30 cm)
Package 2 Width	15.75 in (40 cm)
Package 2 Length	23.62 in (60 cm)
Package 2 Weight	9.37 lb(US) (4.252 kg)
Unit Type of Package 3	PAL
Number of Units in Package 3	60
Package 3 Height	23.62 in (60 cm)
Package 3 Width	31.50 in (80 cm)
Package 3 Length	23.62 in (60 cm)
Package 3 Weight	54.28 lb(US) (24.62 kg)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>


## Contractual warranty

Warranty	18 months
----------	-----------

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

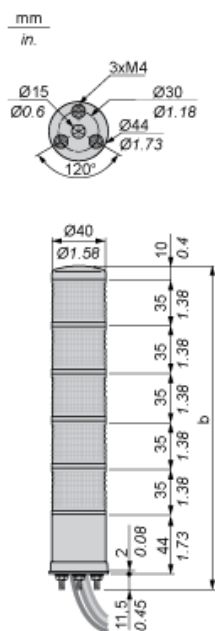

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in)
1 stage	100.50	3.96
2 stages	135.50	5.33
3 stages	170.50	6.71
4 stages	205.50	8.09
5 stages	240.50	9.47

---

Pre-assembled and Pre-wired Tower Light

---

Direct Mounting on Horizontal Support

Panel cut-out

