

RPSP PLASTIC RUNNING MAN

The RPSP series is suitable for property management and institutional applications, and is designed using durable and lightweight high impact thermoplastic. Available in AC only, AC & DC, and self-powered versions.



FEATURES & SPECIFICATIONS

ELECTRICAL CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- Transformer driven sign
- 120/277/347 VAC Input, field selectable
- Power consumption:
 120 V = 0.032 A / 2.1 W
 277 V = 0.008 A / 1.5 W
 347 V = 0.012 A / 2.0 W
- Power consumption in Emergency mode:
 6 VDC = 0.9 W

12 VDC = 0.8 W
 24 VDC = 1.2 W

ELECTRICAL SELF-POWERED

- LED ultra bright light source
- 90 or 120 minutes emergency duration
- 120/277/347 VAC Input, field selectable
- Power consumption:
 120 V = 0.030 A / 2.70 W
 277 V = 0.010 A / 2.18 W

347 V = 0.012 A / 2.64 W




- High-performance Ni-Cad battery

MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- Well suited for damp locations
- White colour is standard
- Universal mounting: ceiling mount, wall mount, end mount

APPROVALS

- CSA Certified to C22.2 #141-15
- CSA Certified to C860-11

OVERVIEW			
LIGHT SOURCE	LED	ENERGY TRANSFER	TRANSFORMER DRIVEN
INPUT VOLTAGE [VAC]	120/277/347	DC INPUT RATING	6 VDC = 0.9 W 12 VDC = 0.8 W 24 VDC = 1.2 W
AC INPUT RATING	120 V = 0.032 A / 2.1 W 277 V = 0.008 A / 1.5 W 347 V = 0.012 A / 2.0 W	SELF POWERED UNIT INPUT RATING	120 V = 0.030 A / 2.70 W 277 V = 0.010 A / 2.18 W 347 V = 0.012 A / 2.64 W
 QUICKSHIP	 LED		

QUICK SHIP GUIDE

PART NUMBER	DC VOLTS (VDC)	NBR OF FACES	LIGHT SOURCE	INPUT VOLTS (VAC)	COLOR
RPSPUWHT-BAT	BAT	UNIVERSAL	LED	120/277/347	WHITE
RPSPUWHT-UNVDC	UNVDC	UNIVERSAL	LED	120/277/347	WHITE

Quick ship product availability is subject to change without notice. Please contact your AimLite customer service representative to confirm inventory levels at time of order.

ORDERING GUIDE

RPSP		WHT	-	/
SERIES	NBR OF FACES ¹ AND MOUNTING	COLOR	DC OUTPUT	OPTIONS
RPSP	U - UNIVERSAL 1 - SINGLE FACE ¹ 2 - DOUBLE FACE ¹	WHT - WHITE	UNVDC - UNIVERSAL DC BACKUP VOLTAGE FROM 6 TO 24 VDC BAT - SELF-POWERED FOR 90 MINUTES BAT1 - SELF-POWERED FOR 120 MINUTES	O - NO INDICATORS (DOUBLE FACE ONLY) ↓ ↑ ↗ ↘ ↙ ↘ D U UR DR DL UL


¹ Unit comes standard as universal face. Single face or double face should only be specified when choosing nonstandard fibers.

WIREGUARD¹

	PART NUMBER	DIMENSIONS (IN)
WALL MOUNT	WGD520	14 X 10 X 4.75
CEILING MOUNT	WGD540	14.5 X 6.25 X 10.5
END MOUNT	WGD650	13.75 X 12.25 X 16.5

¹ Please contact AimLite customer service representative for more information

DIMENSIONS

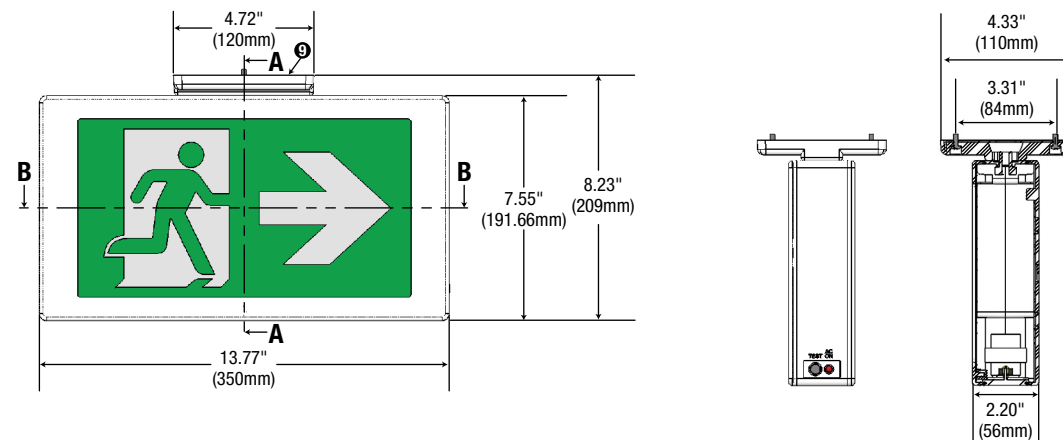

Comes standard with three pictogram legends for direction selection.



For double face no arrow options, select "O" on the options column.