


# Flexible Drill Bits

## Flex Bit Augers


- Used to drill holes through wood within a wall.
- Tapered back for easy bit retrieval.
- Spring steel shaft resists deformation.
- Screw point tip pulls the bit through wood.
- Hole in tip allows for use with wire or cable pulling grip.

Cat. No.	Length	Weight (lbs.)
53716	3/8" x 54" (9.5 mm x 1372 mm)	1.00
53717	3/8" x 72" (9.5 mm x 1829 mm)	1.00
53718	9/16" x 54" (14 mm x 1372 mm)	1.00
53719	3/4" x 54" (19 mm x 1372 mm)	2.00
53751	3/4" x 72" (19 mm x 1829 mm)	2.00
53720	1" x 54" (25 mm x 1829 mm)	2.00

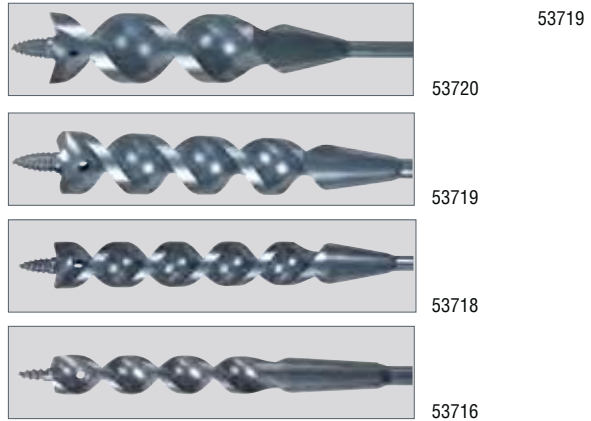

## Flex Bit Extensions

- Connects to the end of a flex bit and extends the length.

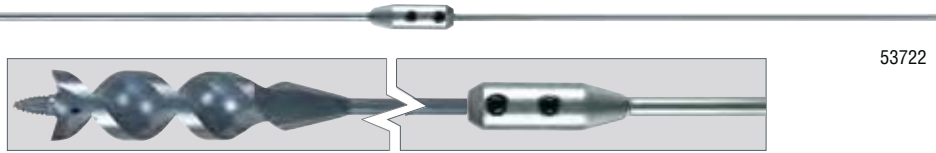

Cat. No.	For Use with Flex Bits	Length	Connection Diameter	Weight (lbs.)
53722	3/4" and larger	54" (1372 mm)	5/8" (14 mm)	1.00
53723	9/16" and smaller	54" (1372 mm)	7/16" (11 mm)	1.00

## Flex Bit Placement Tool

- For use with flexible drill bits.
- Positions flexible drill bits horizontally or vertically within a wall.
- Cushion Grip handle for non-slip comfort.
- Folding design stores more compactly than standard tool.




Cat. No.	Length	Weight (lbs.)
53715-SEN	11" (279 mm)	1.00

## Pulling Grips

### Pulling Grips

- Used to pull wire or cable through walls.
- Pulling grip attaches to the hole in the tip of the flex bit; wire mesh holds the wire during the pull.
- Swivel end helps reduce twisting.

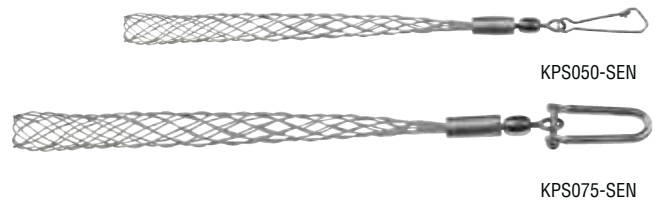

Cat. No.	Capacity	Maximum Safe Load	Weight (lbs.)
KPS050-SEN	1/2" - 9/16" (12 mm - 14 mm)	100 lb	.07
KPS075-SEN	3/4" - 1" (19 mm - 25 mm)	185 lb	.11

**▲WARNING:** Do not exceed maximum safe load as listed on the label attached to the product.

**▲WARNING:** Always match proper size and type of grip to application.

**▲WARNING:** Always inspect equipment before use.

All dimensions are in inches and (millimeters).



**NOTE:** Read and follow safety instructions in power tool owner's manual.

[www.kleintools.com](http://www.kleintools.com)

See page 296 for additional information on warnings.