

FIBER TERMINAL BOX

PDS-0223



DESCRIPTION

The Fiber Terminal Box (FTB) is compact, wall-mountable, and designed for indoor FTTx applications that require up to 2 SC simplex fibers or 2 LC duplex fibers. The FTB provides a secure enclosure for slack management and fiber terminations in MDU applications.

FEATURES and BENEFITS

- Available in white, grey or black
- Can hold up to 2 SC simplex adapters or 2 LC duplex adapters
- Can be wall mounted or mounted on a single gang electrical box
- Side and rear cable entry
- Integrated splice tray: holds up to four 45mm splice sleeves
- Integrated cable management: manage 1 to 4 meters of slack

APPLICATIONS

- FTTH Access Network
- Telecommunication Networks
- CATV Networks
- MDU Point of Entry
- FTTH ONT Access Point

ORDERING INFORMATION


Part Number	Description
WW001170	Fiber terminal box, 2 ports, white
WW001171	Fiber terminal box, 2 ports, black
WW001172	Fiber terminal box, 2 ports, grey

INCLUDED

Part Number	Included
WW001170 WW001171 WW001172	Mounting screws 2 x Tie wraps 1 x Instruction manual

PACKAGING and SHIPPING

Description	Dimensions	Shipping Weight
Poly bag	8.5" x 5.5"	0.045kg

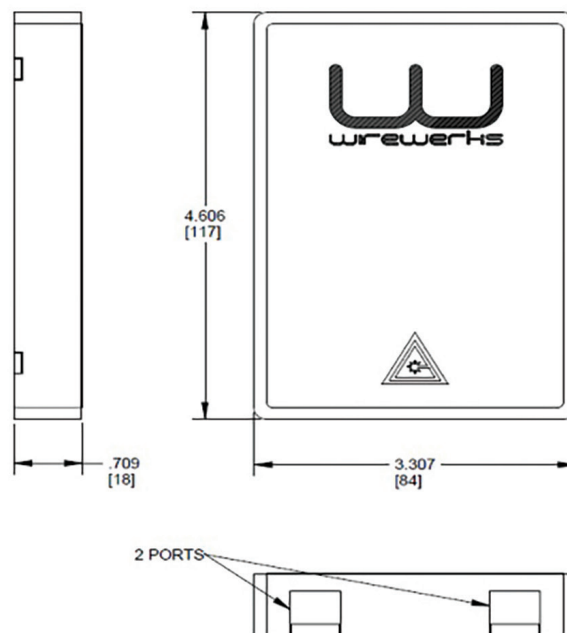

PHYSICAL SPECIFICATIONS

Attribute	Single Gang
Dimensions	117mm x 84mm x 18mm
Weight	0.045 kg
Materials	Plastic
Color & Finish	White, Black and Grey

MECHANICAL SPECIFICATIONS

Parameter	Value
Operating Temperature	Installation: Min: -20°C / Max: +40°C
Storage Temperature	Min: -40°C / Max: +125°C

STANDARDS COMPLIANCE

UL 94
Standard for Safety of Flammability of Plastic Materials for Parts in Devices and Appliances testing

RoHS
Directive on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment

