

WLLED48-CCT

Low Profile Wrap Light



NAME:	
TYPE:	
DATE:	
NOTES:	

SPECIFICATIONS

WIRING:	Hardwire only. Installs easily in traditional junction boxes (3" or 4"). Also features an internal junction box when the application requires linking multiple units in series.
HOUSING DETAILS:	Metal housing with durable plastic end caps. Mounts flush to a wall or ceiling.
OPTICS:	LED strip technology uses a light guided reflector to distribute light and optimize high level of delivered lumens. Integrated LED - no bulbs required. Maintenance free LED ceiling light.
ELECTRICAL:	Easily connected to a 120-277V power supply via provided UL recognized driver. Standard 120-277V, 0-10V dimmable driver. NON-IC and DAMP LOCATIONS rated. Certifications : This product is ETL and DLC 5.1 listed in USA and Canada.
LENS:	A light guide reflector in combination with a white acrylic frosted lens, provides an even light distribution.

COLOR TEMPERATURE:	3K - 4K - 5K
CRI:	80+
LUMEN OUTPUT:	4250 / 5000 / 6000 lumens
DIMMABLE:	Yes
WATTS:	36W / 42W / 52W selectable
LED LIFE:	50,000 hours
WARRANTY:	5 years
VOLTAGE:	120-277V
HEIGHT:	2.6" (6.60 cm)
LENGTH:	47.4" (120.40 cm)
WIDTH:	5.5" (13.97 cm)
INTEGRATED MOTION SENSOR:	No


APPLICATIONS

Low-profile LED wrap around with a frosted diffuser providing a widespread, uniform illumination. Ideal for many applications, including corridors, laundry rooms, kitchens, break rooms, utility work areas and stairways. Ideal for interior ceiling or wall installations in residential or commercial applications.

WLLED48-CCT

Low Profile Wrap Light

DIMENSIONS

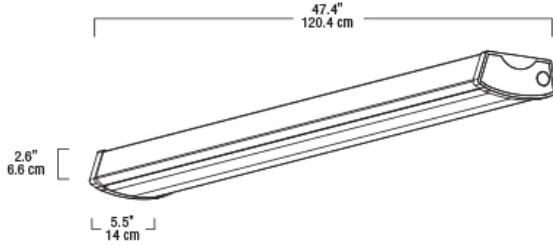

RATINGS



ORDERING GUIDE

COBRAPLUS WRAP LIGHT SERIES

Series	Length	Color Temperature	Finish
WLLED	48	CCT 3K-4K-5K	WH White
Notes:	Configure product using BOLD options: Ex: WLLED48CCT-WH		