



Main

| | |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Pre-wired connectors |
| Series name | General purpose |

Complementary

| | |
|--------------------------------|-------------------------------------|
| Electrical connection | Straight male connector M12, 5 pins |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | Without |
| Cable length | 16.40 ft (5 m) |
| Cable outer diameter | 0.20 in (5.2 mm) |
| Cable composition | 5 x 0.25 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 250 V AC 300 V DC |
| [In] rated current | 3 A |
| Contact resistance | 5000 µOhm |
| Minimum insulating resistance | 1 GΩ |
| Net weight | 0.40 lb(US) (0.18 kg) |

Environment

| | |
|---------------------------------------|----------------------------|
| IP degree of protection | IP65 IP67 |
| Product certifications | CULus |
| Ambient air temperature for operation | -25...80 °C static |
| Ambient air temperature for storage | -13...176 °F (-25...80 °C) |

Packing Units

| | |
|------------------|------------------------|
| Package 1 Weight | 0.48 lb(US) (0.218 kg) |
| Package 1 Height | 0.400 dm |

| | |
|------------------|----------|
| Package 1 width | 2.400 dm |
| Package 1 Length | 3.000 dm |


Offer Sustainability

| | |
|----------------------------|---|
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

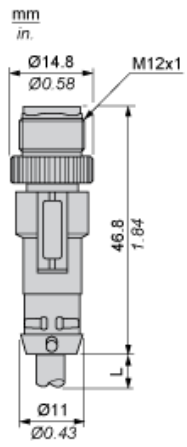

L : Length of cable

Connections and Schemes

Connectors



- BU : Blue
- BN : Brown
- BK : Black
- Y/G : Yellow / Green
- BK/WH : Black / White