

HOLDER FOR CLASS CC CYLINDRICAL FUSES, WITH LED

30 A / 600 V, CLASS CC / WITH LUMINOUS INDICATION



AMBUS® EasySwitch Class CC

For Class CC fuses in compliance with UL 248-4 up to 30A. Compliant with American standard with a shortcircuit capacity of up to 200 kA.




	31298	31299	31300
Description	Art. No.: 31298 Ambus EasySwitch Class CC holder for cylindrical fuses Class CC 1-pole with luminous indication	Art. No.: 31299 Ambus EasySwitch Class CC holder for cylindrical fuses Class CC 2-pole with luminous indication	Art. No.: 31300 Ambus EasySwitch Class CC holder for cylindrical fuses Class CC 3-pole with luminous indication
Standards	UL 512 CSA C22.2 No. 39	UL 512 CSA C22.2 No. 39	UL 512 CSA C22.2 No. 39
Approvals	GOST, CSA, UL (approved for feeder circuits to UL 508A up to 600 V) Type No.: AES CC 	GOST, CSA, UL (approved for feeder circuits to UL 508A up to 600 V) Type No.: AES CC 	GOST, CSA, UL (approved for feeder circuits to UL 508A up to 600 V) Type No.: AES CC
Electrical Data	30 A, 600 V (60 Hz) Rated insulation voltage: 800 V For fuse links Class CC to UL 248-4 Luminous indication Range of operating voltage: 110 - 600 V AC / DC	30 A, 600 V (60 Hz) Rated insulation voltage: 800 V For fuse links Class CC to UL 248-4 Luminous indication Range of operating voltage: 110 - 600 V AC / DC	30 A, 600 V (60 Hz) Rated insulation voltage: 800 V For fuse links Class CC to UL 248-4 Luminous indication Range of operating voltage: 110 - 600 V AC / DC
Mechanical Data	Width x Height x Depth (mm): 18 x 81 x 58 Weight (kg/100): 6,7 Fastening method: clip-on mounting	Width x Height x Depth (mm): 36 x 81 x 58 Weight (kg/100): 13,3 Fastening method: clip-on mounting	Width x Height x Depth (mm): 54 x 81 x 58 Weight (kg/100): 20,2 Fastening method: clip-on mounting
Pack Size	12	6	4

30 A / 72 V, CLASS CC / 1P, WITH LUMINOUS INDICATION

AMBUS® EasySwitch Class CC

For Class CC fuses in compliance with UL 248-4 up to 30A. Compliant with American standard with a shortcircuit capacity of up to 200 kA.

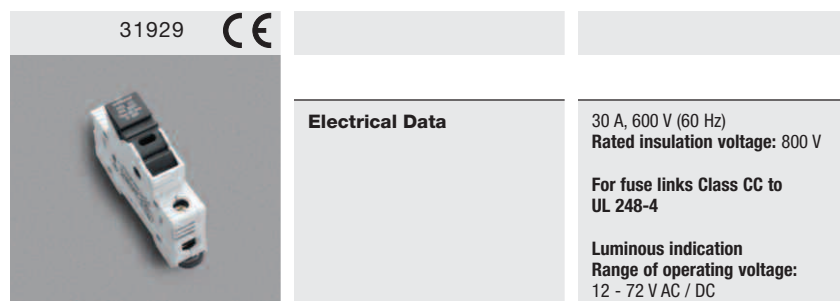

	31929	
Description	Art. No.: 31929 Ambus EasySwitch Class CC holder for cylindrical fuses Class CC 1-pole with luminous indication	
Standards	UL 512 CSA C22.2 No. 39	
Approvals	GOST, UL (approved for feeder circuits to UL 508A up to 600 V) Type No.: AES CC 	
Electrical Data		30 A, 600 V (60 Hz) Rated insulation voltage: 800 V For fuse links Class CC to UL 248-4 Luminous indication Range of operating voltage: 12 - 72 V AC / DC
Mechanical Data		Width x Height x Depth (mm): 40 x 118 x 82 Weight (kg/100): 18,2 Fastening method: clip-on mounting
Pack Size		12

