

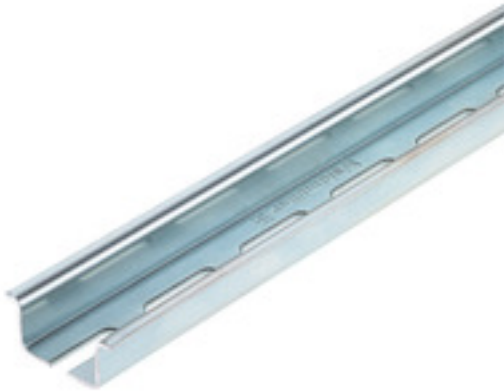
**TS 35X15/LL 2M/ST/ZN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

**General ordering data**

|            |   |
|------------|---|
| Version    | Terminal rail, Accessories, Steel, galvanic zinc plated and passivated, Width: 2000 mm, Height: 35 mm, Depth: 15 mm, Slit width: 5.20 mm, Slit length: 25.00 mm |
| Order No.  | <a href="#">023650000</a>   |
| Type       | TS 35X15/LL 2M/ST/ZN  |
| GTIN (EAN) | 4008190183967   |
| Qty.       | 2 m   |

Creation date November 26, 2024 11:44:25 AM CET

Catalogue status 26.11.2024 / We reserve the right to make technical changes.

## TS 35X15/LL 2M/ST/ZN

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Dimensions and weights

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Depth      | 15 mm    | Depth (inches)  | 0.591 inch |
| Height     | 35 mm    | Height (inches) | 1.378 inch |
| Width      | 2,000 mm | Width (inches)  | 78.74 inch |
| Net weight | 627 g    |                 |            |

### Mounting rail

|  |                                     |          |
|--|-------------------------------------|----------|
| Drill-hole diameter  | 5.2 mm                              |          |
| Installation advice  | Direct mounting                     |          |
| Length of the terminal rail  | min.                                | 0 mm     |
|  | nominal                             | 2,000 mm |
|  | max.                                | 2,000 mm |
| Material   | Steel                               |          |
| Pre-punched mounting rail  | Yes                                 |          |
| Short circuit strength corresponds to E-Cu wire                    | 50 mm <sup>2</sup>                  |          |
| Short-time withstand current per second according to IEC 60947-7-2 | 6 kA                                |          |
| Slit gap   | 11 mm                               |          |
| Slit gap   |                                     |          |
| Slit length  | 25 mm                               |          |
| Slit length  |                                     |          |
| Slit width   | 5.2 mm                              |          |
| Slit width   |                                     |          |
| Slotted drill holes  | Yes                                 |          |
| Solder eyelet hole diameter (D)                                    | 5.2 mm                              |          |
| Spacing of holes, centre-to-centre                                 | 36 mm                               |          |
| Standards  | In accordance with DIN EN 60715     |          |
| Surface finish   | galvanic zinc plated and passivated |          |
| Thickness  | 1.5 mm                              |          |

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001285    | ETIM 7.0    | EC001285    |
| ETIM 8.0    | EC001285    | ETIM 9.0    | EC001285    |
| ECLASS 9.0  | 27-40-06-02 | ECLASS 9.1  | 27-40-06-02 |
| ECLASS 10.0 | 27-40-06-02 | ECLASS 11.0 | 27-40-06-02 |
| ECLASS 12.0 | 27-40-06-02 | ECLASS 13.0 | 27-40-06-02 |
| ECLASS 14.0 | 27-40-06-02 |             |             |

### Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

### Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

### Downloads

|                    |   |
|--------------------|---|
| Engineering Data   | <a href="#">CAD data – STEP</a>                 |
| User Documentation | <a href="#">StorageConditionsTerminalBlocks</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>        |
| Brochures          |   |

Creation date November 26, 2024 11:44:25 AM CET

**Data sheet**

**TS 35X15/LL 2M/ST/ZN**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

