

SNAP²IT[®]

Connectors

Zinc die-cast. For AC • MCI-A • HCF steel and aluminum cable • Flexible metal conduit steel and aluminum (regular and reduced wall) • MCI cable • Continuous corrugated aluminum • AC90.



38AST



40AST

For **EASIER**
MC/AC INSTALLATIONS
see
3810AST to 7510AST
on Page E-2



NO TOOLS!

- Safe and fast installations
- **Saves about 17 seconds** per fitting!
- Competitively priced

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	KO SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D	CABLE RANGE
38AST*	00070	3/8	1/2	50	500	1.410	.850	.405	1.000	.405 - .612
38A*	00038	3/8	1/2	50	500	1.410	.850	.405	1.000	.405 - .612
380ST	00381	3/8	1/2	50	500	1.280	.850	.400	1.000	.405 - .612
380AST*	00382	3/8	1/2	50	500	1.280	.850	.400	1.000	.405 - .612

*Provided with insulated throat.

PATENTED.

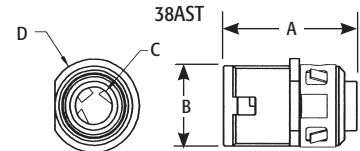

With Insulated Throat and **Red Tinted Inside Clip**

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	KO SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D	CABLE RANGE
40AST	00041	3/8	1/2	50	500	1.410	.850	.405	1.000	.485 - .612
400AST	40347	3/8	1/2	50	500	1.280	.850	.400	1.000	.485 - .612

Refer to chart on page E-22 for a list of cable types.

Concrete tight when taped.

Flexible metal conduit, CSA listed with anti-short bushing (UL not applicable).

SNAP-TITE[®] and SNAP²IT[®] products have been tested and listed by UL in accordance with UL's ground fault requirements. For additional information see page 7.

See page E-25 for MCI-A cable ranges.


PATENTED.



SNAP²IT Connectors are EASY to Install...




Snap onto cable and give a clockwise twist.



Just snap into box!

And EASY to Remove...




Using a screwdriver, lift the ring and twist off.

COMPARE...



38AST



40AST

RED TINTING means
'OPEN TANG' Design!

It gives you **more room** inside the fitting for easy insertion of wires.

The redesigned front end makes it easier than ever to snap the fitting into box!