



### Main

Range of Product	Profibus DP
Product or Component Type	Profibus DP V0 module kit
Kit composition	Host module for the PCMCIA card Profibus DP PCMCIA card with its integrated connecting cable (0.6 m) T-junction box enabling the tap link of the main bus
Product Compatibility	For Premium PLC For Atrium slot-PLC
Structure type	Industrial bus

### Complementary

Physical interface	RS485
Method of access	Master class 1 Master class 2
Mode of Transmission	NRZ
Transmission support medium	Twisted shielded pairs cable
Transmission rate	12 Mbit/s, 328.08 ft (100 m) without repeater 12 Mbit/s, 1312.34 ft (400 m) with 3 repeaters 9.6 kbit/s, 3937.01 ft (1200 m) without repeater 9.6 kbit/s, 15748.03 ft (4800 m) with 3 repeaters
Number of slave	126
Number of inputs	3872
Number of outputs	3872
Communication service	Check slave configuration (on power up) class 1 master Manage monitoring request (Global CONTROL and Get Master Diag) class 2 master No master/master dialogue class 2 master Profibus FMS message handling not supported class 1 master Profibus FMS message handling not supported class 2 master Read/Write DP slave I/O data class 1 master Set slave parameters (on power up) class 1 master Transfer slave diagnostic data class 1 master
Current consumption	400 mA 5 V DC internal
Module format	Standard
Net Weight	1.92 lb(US) (0.87 kg)


### Environment

Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
Ambient Air Temperature for Storage	-13...158 °F (-25...70 °C)
Relative Humidity	5...95 % without condensation
Operating altitude	<= 6561.68 ft (2000 m)
Protective treatment	Conformal coating Humiseal 1A33

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

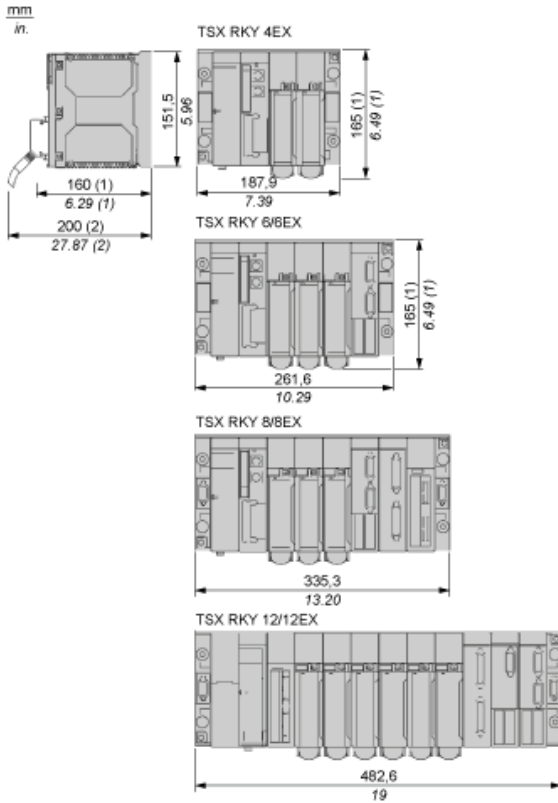

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.