

Product data sheet

Specifications



Safety switch, VisiPacT, heavy duty, fused, viewing window, NEMA 4X, 240V, 100A, 2 pole, neutral bonded, ground lugs

VH223BDSGL

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	Neutral (factory bonded)
Number of Poles	2
Current Rating	100 A
Voltage Rating	250 V DC 240 V AC
Enclosure Rating	NEMA 4X stainless steel 304
Standard Motor Power Rating	7.5 hp at 240 V AC 50-60 Hz for 1 phase motors 15 hp at 240 V AC 50-60 Hz for 3 phase motors 15 hp at 240 V AC 50-60 Hz for 1 phase motors 30 hp at 240 V AC 50-60 Hz for 3 phase motors 20 hp at 250 V DC

Complementary

Short-circuit current	200 kA for J
Fuse type	J
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	3-wire (2P + N)
Wire Size	AWG 12...AWG 1/0 aluminium AWG 14...AWG 1/0 copper
Tightening torque	50 lbf.in (5.6 N.m) (AWG 1...AWG 3/0) 45 lbf.in (5.08 N.m) (AWG 6...AWG 4) 40 lbf.in (4.5 N.m) 0.013 in² (8.367 mm²) (AWG 8) 35 lbf.in (4.0 N.m) 0.003...0.008 in² (2.06...5.261 mm²) (AWG 14...AWG 10)
Depth	7.2 in (182.9 mm)
Width	9.336 in (237.134 mm)
Height	20.73 in (526.54 mm)
Product Weight	22.99 lb(US) (10.43 kg)
Grounding Kit	Factory installation
Service Entrance	Suitable service entrance for Canada

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

Certifications	UL listed file E2875
Standards	UL98 CSA C22.2 No 4 NOM-003-SCFI-2000

Ordering and shipping details

Category	US10DE100010
Discount Schedule	0DE1
GTIN	3606485893235
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	11.50 in (29.21 cm)
Package 1 Width	7.50 in (19.05 cm)
Package 1 Length	22.625 in (57.467 cm)
Package weight(Lbs)	13.2 lb(US) (6 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	113 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	64 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	3 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.4 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	20 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	25 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	83
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration


Dimensions

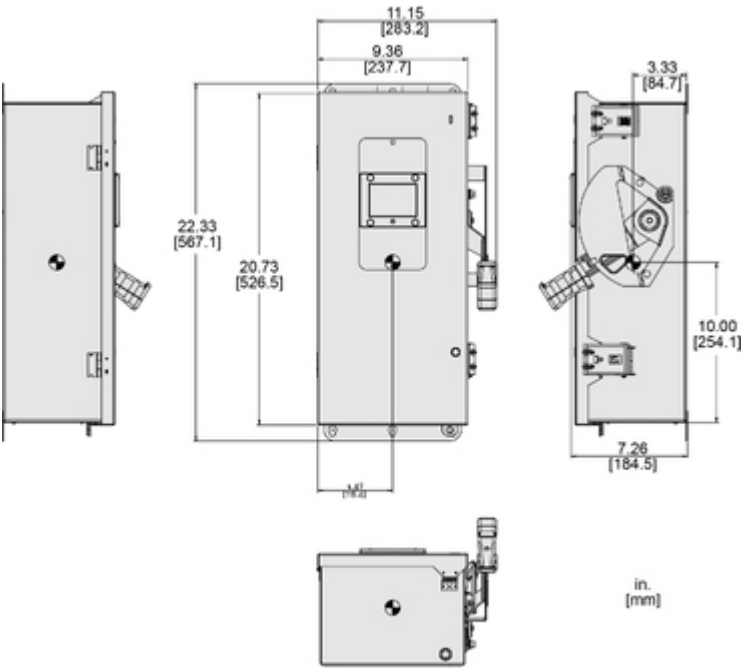

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

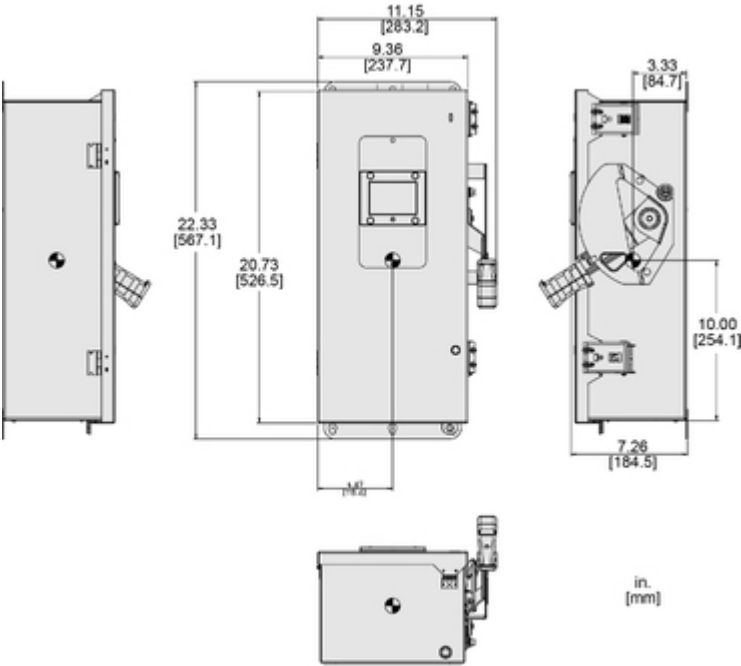

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.