
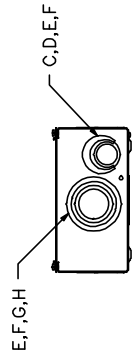


KNOCKOUTS							
SYMBOL	C	D	E	F	G	H	
IN	1.00	1.25	1.50	2.00	2.50	3.00	
MM	25	32	38	51	64	76	

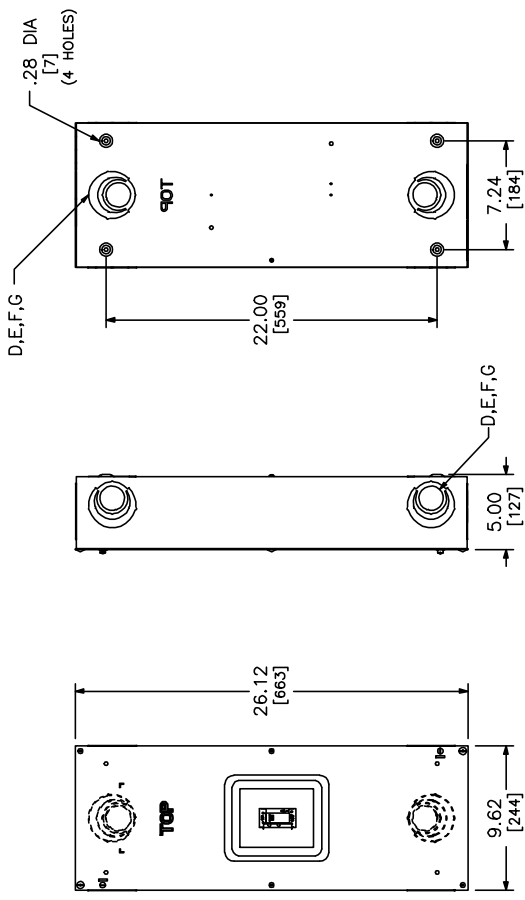

DUAL DIMENSIONS: INCHES
MILLIMETERS

SERVICE	AMPERE RATING	GENERAL PURPOSE NEMA TYPE 1	CIRCUIT BREAKER (FACTORY INSTALLED)	NEUTRAL ASSEMBLY *		
				TERMINAL LUG WIRE SIZE AWG / CU	NEUTRAL LUG WIRE SIZE	
					NEUTRAL TERMINALS	GROUNDING TERMINALS
TWO POLE  240VAC	200	QDE22200NSGLC +	UL LISTED INTERRUPTING RATING RMS SYM AMPERES	#4-300 AL/CU	#12-1/0 AL OR #14-1/0 CU	BONDED

NOTES:
FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.
cUL LISTED - FILE E-138861
SUITABLE FOR USE AS SERVICE ENTRANCE EQUIPMENT
+ EQUIPMENT GROUND KIT FACTORY INSTALLED.
* NEUTRAL FACTORY INSTALLED
▲ DEVICE IS cUL ONLY AND NOT SUITABLE FOR USE IN THE USA.

POWERPACT Q FRAME
CIRCUIT BREAKER ENCLOSURES
CIRCUIT BREAKER FACTORY INSTALLED



DWG# PTCCB-ENCCB-0001