



# Chicago™ Grips

## 1656 Series

- Round, smooth inside jaw contour on this series of grips is ideal for bare ACSR.
- Smooth jawed grips with maximum contact are less likely to cause cable deformation.

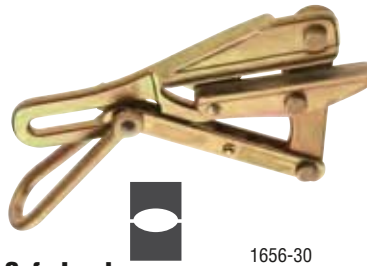

1656-30

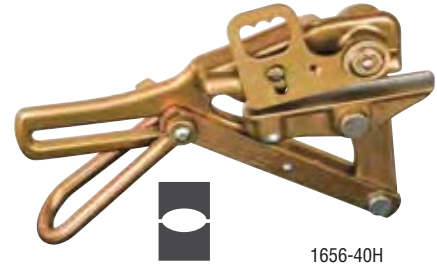

1656-40H

### A 4,500 lbs. (2,041 kg) Maximum Safe Load

Cat. No.	Hot Latch Model No.	Hot Latch/Spring Model No.	Min. to Max. Cable Diameter inches (mm)	Jaw Length	Approx. Weight Each
1656-20	1656-20H	S1656-20H	.20" - .40" (5.08 mm - 10.16 mm)	4" (102 mm)	3 lbs. (1.36 kg)
1656-30	1656-30H	S1656-30H	.31" - .53" (7.88 mm - 13.46 mm)	4-3/4" (121 mm)	3.75 lbs. (1.70 kg)

### B 8,000 lbs. (3,629 kg) Maximum Safe Load

Cat. No.	Hot Latch Model No.	Hot Latch/Spring Model No.	Min. to Max. Cable Diameter inches (mm)	Jaw Length	Approx. Weight Each
1656-40	1656-40H	S1656-40H	.53" - .74" (13.46 mm - 18.79 mm)	5-1/2" (140 mm)	8.30 lbs. (3.76 kg)
1656-50	1656-50H	S1656-50H	.74" - .86" (18.80 mm - 21.84 mm)	5-1/2" (140 mm)	8.30 lbs. (3.76 kg)
1656-60	1656-60H	S1656-60H	.86" - .96" (21.84 mm - 24.38 mm)	5-1/2" (140 mm)	8.30 lbs. (3.76 kg)


## 1628-16P and 1628-30 Series

- Round jaws are shaped to provide maximum contact with the cable, virtually eliminating cable deformation.
- Designed for large-diameter ACSR cables.

### C 15,000 lbs. (6,803 kg) Maximum Safe Load

Cat. No.	Min. to Max. Cable Diameter inches (mm)	Jaw Length	Approx. Weight Each
1628-16PE*	.31" - .33" (7.88 mm - 8.33 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)
1628-16PF*	.33" - .39" (8.36 mm - 9.90 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)
1628-16PG*	.40" - .45" (9.93 mm - 11.50 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)
1628-16PH*‡	.46" - .52" (11.53 mm - 13.08 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)
1628-16PI*	.52" - .58" (13.11 mm - 14.68 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)
1628-16PJ*	.58" - .64" (14.71 mm - 16.25 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)
1628-16PK*	.64" - .70" (16.28 mm - 17.86 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)
1628-16PL*	.71" - .76" (17.89 mm - 19.43 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)
1628-16PM*	.77" - .82" (19.46 mm - 21.03 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)
1628-16PN*	.83" - .89" (21.06 mm - 22.61 mm)	7-1/4" (184 mm)	17 lbs. (7.73 kg)

‡ The "H" suffix does not mean Hot Latch, this is only for Cat. No. 1628-16PH.

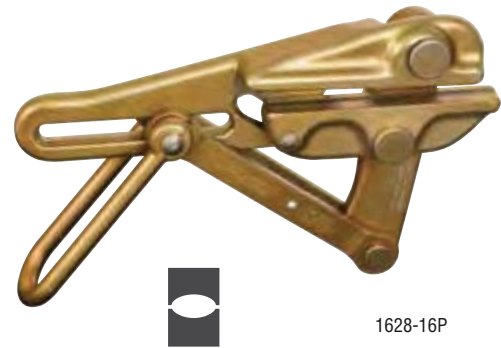

1628-16P

### D 20,000 lbs. (9,072 kg) Maximum Safe Load

Cat. No.	Min. to Max. Cable Diameter inches (mm)	Jaw Length	Approx. Weight Each
1628-30N*	.83" - .89" (21.06 mm - 22.61 mm)	10-3/4" (273 mm)	27 lbs. (12.27 kg)
1628-300*	.89" - .96" (22.63 mm - 24.21 mm)	10-3/4" (273 mm)	27 lbs. (12.27 kg)

\*These grips are special order only. Please allow 30 days for delivery. These are not returnable.



1628-30

All dimensions are in inches and (millimeters).

[www.kleintools.com](http://www.kleintools.com)

See Wire Pulling Grip Warnings on page 261.

