

Technical Information Bulletin


LED Lamps



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 66769
 Description: G25/S2/7W/30K/FR/STD
 UPC: 69549667693
 Case quantity: 24 / 48

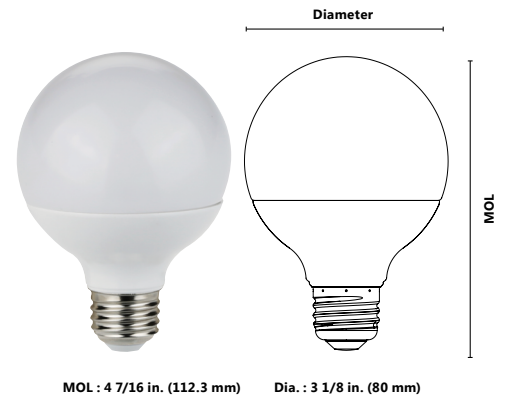

PERFORMANCE DATA

Shape: G25
 Base: E26
 Watts(W): 7
 Volts (VAC): 120
 Colour temperature (K)**: 3 000
 Average life (L70 hours): 15 000
 Initial lumens (lm)*: 553
 Initial lumens per watt (lm/W): 79
 CRI: 82
 Beam angle: 220
 Power factor: 0.95
 Operating temperature range: -20 °C to 45 °C (-4 °F to 113 °F)

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %

COMPATIBLE DIMMERS

| | |
|---------|--|
| Legrand | HCL453P, RH703PTUTC |
| Cooper | DAL06P, SLC03P |
| Leviton | DSL06-1LZ, DSM10-1LZ |
| Lutron | CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, MACL-153P |



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Not for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Added weight of the device may cause instability of a free-standing portable luminaire. Use only with a portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- For complete dimmer and warranty information visit www.standardpro.com.
- 3 Years Limited Warranty.
- Operating temperature: - 20°C to 45°C (- 4°F to 113°F)

| Qty | Description | Price |
|-----|-------------|-------|
| | | |

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____ Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.