


Product data sheet

Characteristics

8911DPSO23V09

NEMA starter, Definite Purpose, 25A, 20HP at 600VAC, 3 phase, 3 pole, melting alloy, 208V to 240VAC coil, open

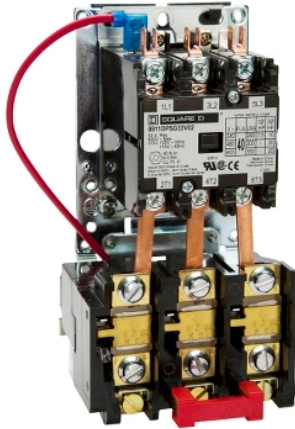

Main

Product	Definite Purpose Starter
Ampere Rating	25 A
Horsepower Rating	2 Hp 115 V AC, 1 phase 5 Hp 230 V AC, 1 phase 10 Hp 230 V AC, 3 phase 15 Hp 460 V AC, 3 phase 20 hp 575 V AC, 3 phase
Maximum Voltage Rating	600 V AC
Control Circuit Voltage	220 V AC 50 Hz 208...240 V AC 60 Hz
Phase	3 phase

Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	150 A 230 V AC 125 A 460 V AC 100 A 575 V AC
Number of Poles	3P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	3

Ordering and shipping details

Category	21381-8911 DP
Discount Schedule	CP1
GTIN	785901342793
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.80 in (12.192 cm)
Package 1 Width	4.80 in (12.192 cm)
Package 1 Length	8.00 in (20.32 cm)
Package 1 Weight	2.29 lb(US) (1.039 kg)

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------
