


Product data sheet

Characteristics

9999D01

Contacteur, Definite Purpose, auxiliary contact, 3A at 120 VAC, 1 NC contact, for 20A to 90A DPA contactors

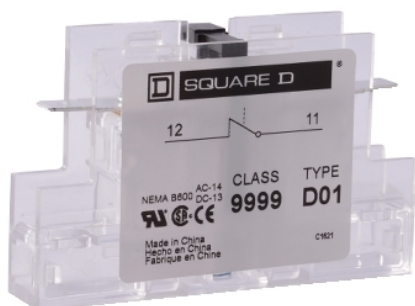

Main

Product Range	DPA
Component type	Auxiliary Contact Module
Used with	contacteur

Complementary

Auxiliary contact composition	1 NC
Rated breaking capacity	3 A 120 V AC inductive control circuit UL 508 1.5 A 240 V AC inductive control circuit UL 508 0.75 A 480 V AC inductive control circuit UL 508 0.6 A 600 V AC inductive control circuit UL 508 5 A <= 600 V AC resistive control circuit UL 508

Environment

Product Certifications	CSA[RETURN]UL Recognized
------------------------	--------------------------

Ordering and shipping details

Category	21762-9999 DISCOUNT CP1B
Discount Schedule	CP1B
GTIN	785901080879
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.70 in (1.778 cm)
Package 1 Width	1.70 in (4.318 cm)
Package 1 Length	3.00 in (7.62 cm)
Package 1 Weight	1.12 oz (31.752 g)

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes

Contractual warranty

Warranty

18 months
