

KeyWerks 12-Port Wall-Mount Panel

Description

The KeyWerks 12-Port Wall Mount patch panel is designed for space saving and low-density applications. The patch panel is made for exceptional performance with powdered-black 16-Gauge cold-rolled steel. It also includes a standard 89D bracket for easy mounting on the wall. The bracket is manufactured from high-quality ABS UL 94V-0. The patch panel snaps into the 89D bracket effortlessly without requiring any tools. For port identification, each port is numbered to identify quickly the cable runs. The versatile wall-mount supports all Keywerks copper, fiber and multimedia modules. The modules are sold separately.

Features and Benefits


Industry standard 89D Bracket included for easy wall-mounting	Keywerks modules can be independently installed/ uninstalled
Compatible with Keywerks keystone modules or any other keystone product	Numbered ports for quick port identification
Easily snaps into 89D bracket	Instruction sheet and Tie-Wraps Included


Applications

Data Centers	Work Area
Telecommunications Room	Consolidation Points
Equipment Room	MDU Residential Solutions

Certification and Compliance

cULus	Bi-national (Canada, US) Listed Communication Circuit Accessories.
ANSI/TIA-568-C.2	With Applicable Electrical Transmission Characteristics.
TIA-606-A	Administration Standard for Telecommunications Infrastructure.
EIA-310-D	Requirements for Cabinets, Racks, Panels, and Associated Equipment.
FCC 47 part 68	Connection of the Terminal Equipment to the Telephone Network.
RoHS	Directive on Restriction of Hazardous Substances.

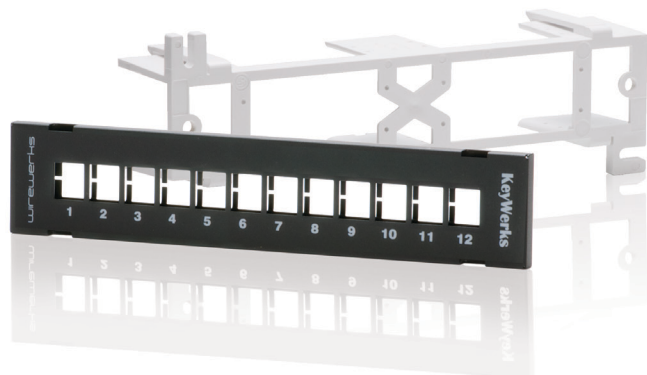

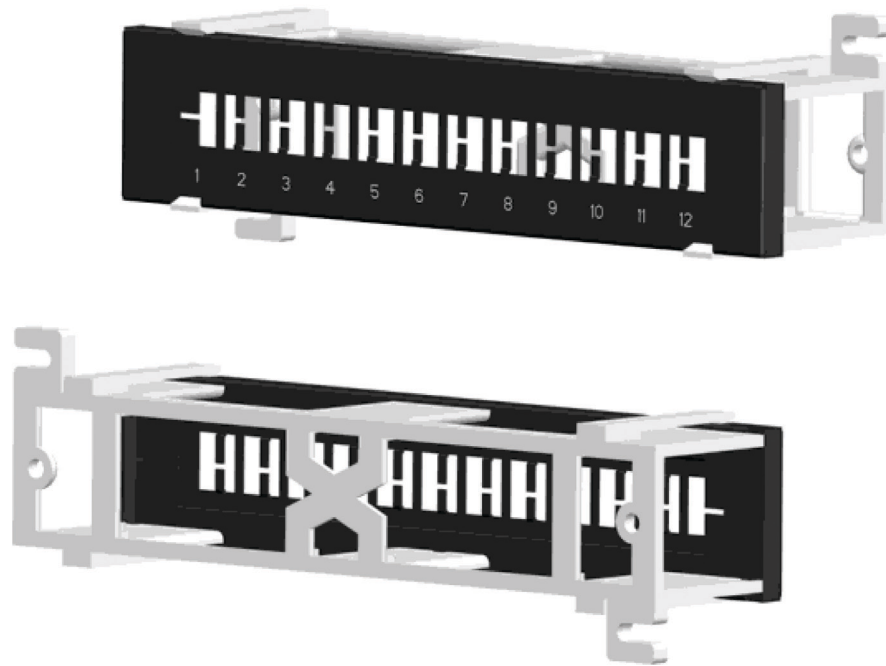

Ordering Information

Description	Part Number
Keywerks 12-port patch panel, wall mount,black, empty	WW000830

Inclusion

Description
1 X 89D Bracket, 4 X Tie-Wrap 4" Long, Instruction manual

Physical Characteristics

Parameter	Value
Material (Panel)	16-Gauge Cold-Rolled Steel (C.R.S)
Material (89D Bracket)	ABS UL94V-0 Plastic
Storage Temp	Min -40°C (-40°F) Max 125°C (257°F)
Operation Temp	Min -20°C (-4°F) Max 60°C (104°F)
Dimensions (W X D X H)	10" X 2.06" X .39"