

Product data sheet

Characteristics

XVBL1G7

Ø 70 mm tower light - flashing - clear - IP65 - 120 V



Main

Range of product	Harmony XVB Universal
Product or component type	Complete beacon
Beacon or indicator bank unit type	Base unit direct or tube fixing Illuminated unit
Signalling type	Flashing
Mounting diameter	2.76 in (70 mm)
Component name	XVBL
Material	Glass reinforced polyamide base unit Polycarbonate illuminated unit
Light source	Integral LED, clear
Bulb type	Protected LED
[Us] rated supply voltage	120 V AC

Complementary

Connections - terminals	Screw clamp terminals, <= 1 x 1.5 mm ² with cable end
[Ui] rated insulation voltage	250 V IEC 60947-1
Nominal voltage limit	0.85...1.1 Un IEC 60947-5-1
Current consumption	< 17 mA AC
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1
Flashing frequency	1 Hz
CAD overall width	2.76 in (70 mm)
CAD overall height	5.47 in (139 mm)
CAD overall depth	2.76 in (70 mm)
Terminals description ISO n°1	(GND)GROUND (COM-1)PW
Net weight	0.62 lb(US) (0.28 kg)

Environment

Pollution degree	2
Product certifications	CSA C22-2 No 14 GOST

	CCC UL 508
Standards	EN/IEC 60947-5-1
Protective treatment	TC
Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Electrical shock protection class	Class I on support tube conforming to IEC 61140 Class II on base unit conforming to IEC 61140
IP degree of protection	IP65 on fixing base XVBZ0. conforming to IEC 60529 IP66 on base unit conforming to IEC 60529
NEMA degree of protection	NEMA 4X UL 508 indoor)

Packing Units


Package 1 Weight	0.63 lb(US) (0.287 kg)
Package 1 Height	1.450 dm
Package 1 width	0.800 dm
Package 1 Length	0.800 dm

Contractual warranty

Warranty	18 months
----------	-----------

Illuminated Beacon for BA 15d Bulb or LED

Dimensions

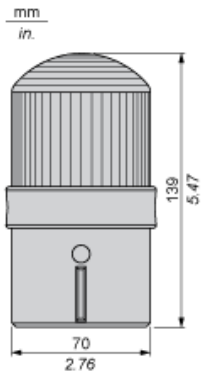

Illuminated Beacon

Wiring Diagram

