

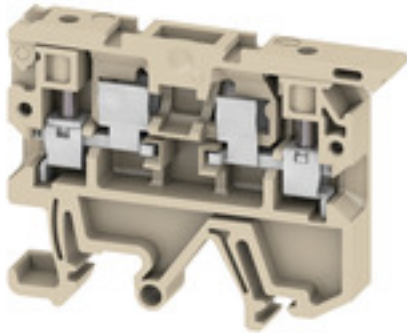
ASK1EN/SMT 10-60VUC BFI H-**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Similar to illustration

In some applications it is useful to protect the feed through connection with a separate fuse. Fuse terminal blocks are made up of one terminal block bottom section with a fuse insertion carrier. The fuses vary from pivoting fuse levers and pluggable fuse holders to screwable closures and flat plug-in fuses.

General ordering data

Version	Fuse terminal, Screw connection, 4 mm ² , 60 V, Number of connections: 2, Number of levels: 1, TS 35, TS 32, V-2, PA 66
Order No.	0222760001
Type	ASK1EN/SMT 10-60VUC BFI H-
GTIN (EAN)	4032248730926
Qty.	100 pc(s).

Creation date November 26, 2024 11:47:37 AM CET

Catalogue status 26.11.2024 / We reserve the right to make technical changes.

ASK1EN/SMT 10-60VUC BFI H-**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	43 mm	Depth (inches)	1.693 inch
Height	58 mm	Height (inches)	2.283 inch
Width	8.1 mm	Width (inches)	0.319 inch
Net weight	12.85 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

Material data

Material	PA 66	UL 94 flammability rating	V-2
----------	-------	---------------------------	-----

System specifications

Version	Screw connection, Fuse cartridge, One end without connector	Number of levels	1
Number of clamping points per level	2	Levels cross-connected internally	No
PE connection	No	Rail	TS 35, TS 32

Additional technical data

Type of mounting	Snap-on
------------------	---------

Conductors for clamping (rated connection)

Number of connections	2	Type of connection	Screw connection
-----------------------	---	--------------------	------------------

General

Rail	TS 35, TS 32
------	--------------

Rating data

Rated cross-section	4 mm ²	Rated voltage	60 V
Rated DC voltage	60 V	Volume resistance according to IEC 60947-7-x	1 mΩ
Power loss in accordance with IEC 60947-7-x	1.02 W		

Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ETIM 8.0	EC000899	ETIM 9.0	EC000899
ECLASS 9.0	27-14-11-16	ECLASS 9.1	27-14-11-16
ECLASS 10.0	27-14-11-16	ECLASS 11.0	27-14-11-16
ECLASS 12.0	27-14-11-16	ECLASS 13.0	27-25-01-13
ECLASS 14.0	27-25-01-13		

Environmental Product Compliance

RoHS Compliance Status	Compliant
REACH SVHC	No SVHC above 0.1 wt%

Creation date November 26, 2024 11:47:37 AM CET

