



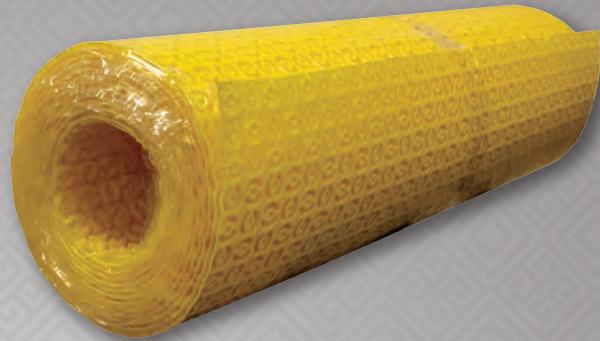

Uncoupling self-adhesive membrane for floor heating cable, OTR Series

Prevents all movement or cracks in the subfloor
from being transferred to the floor covering.

- Can be installed by an electrician;
- Self-adhesive, no need for concrete adhesive;
- Quick installation and no wait time between laying the membrane and laying the cable;
- Castellation structure designed for quick and easy installation of cables, North America approved model;
- Optimal heat distribution from the cable to the floor;
- Spacing of 3 5/8" and a density of 10W/sq. ft.

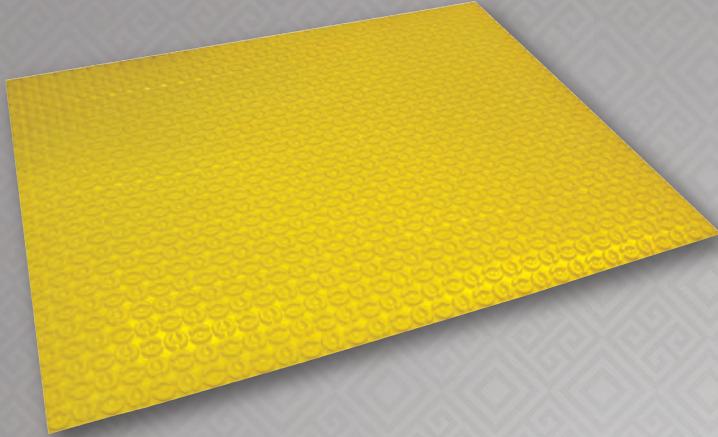

Membrane in sheets NADCM-S-80


Box of 10 sheets - 2'6-5/16" x 3'3"
Covered surface 81.6 sq. ft.

Membrane in rolls NADCM-S-150

Roll of - 46'7" x 3'3"
Covered surface 150 sq. ft.

Approved

The DCM-PRO membrane is suitable for heavy commercial applications according to the Robinson C627 test.
Rated as Anti-Fracture membrane as tested by the TCNA against ANSI A118-12.

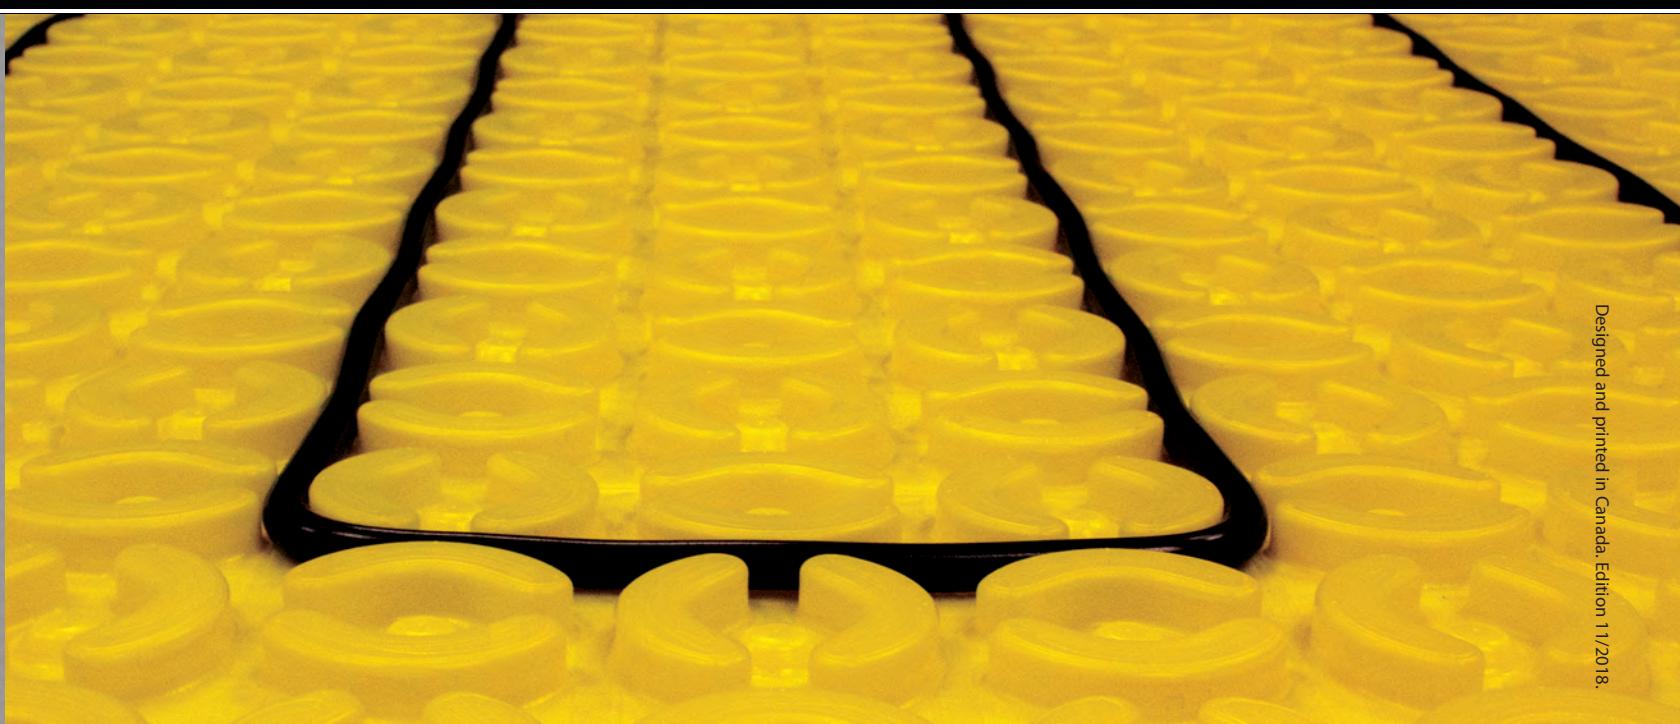

Designed and printed in Canada. Edition 11/2018.