


TYPE GPL

Made from high copper content alloy. Furnished with silicon bronze bolt, nuts and lockwashers.

Universal parallel or 90° cable connection to rod or pipe

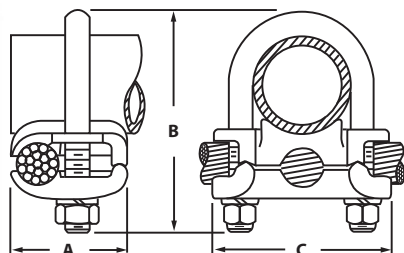

Certified to maximum wire size of 250 kcmil for UL467 grounding and bonding standard.

Catalog Number	Accommodates		Conductor Range	Wire Diameter Range	Approximate Dimensions						
	Rod	IPS			A		B		C		Bolt Dia.†
					in	mm	in	mm	in	mm	
GPL-1 *	1/2	1/4	8 Sol.-4 Str.	.128- .232	1 3/8	34	2 1/2	64	1 7/8	47	3/8
GPL-2 *	1/2	1/4	4 Sol.-2/0 Str.	.204- .419	1 5/8	41	2 1/2	64	1 7/8	47	3/8
GPL-3 *	1/2	1/4	2/0 Sol.-250 MCM	.365- .575	1 7/8	47	2 1/2	64	1 7/8	47	3/8
GPL-4	5/8 or 3/4	3/8	8 Sol.-4 Str.	.128- .232	1 3/8	34	2 3/4	70	2	51	3/8
GPL-5	5/8 or 3/4	3/8	4 Sol.-2/0 Str.	.204- .419	1 5/8	41	2 3/4	70	2	51	3/8
GPL-6	5/8 or 3/4	3/8	2/0 Sol.-250 MCM	.365- .575	1 7/8	47	2 3/4	70	2	51	3/8
GPL-7 *	5/8 or 1	3/8 or 3/4	300-500 MCM*	.634- .815	2 1/4	57	3 1/2	89	2 3/8	60	1/2
GPL-8	7/8 or 1	1/2 or 3/4	8 Sol.-4 Str.	.128- .232	1 3/8	34	2 5/8	67	2 3/8	60	3/8
GPL-9	7/8 or 1	1/2 or 3/4	4 Sol.-2/0 Str.	.204- .419	1 5/8	41	2 5/8	67	2 3/8	60	3/8
GPL-10	7/8 or 1	1/2 or 3/4	2/0 Sol.-250 MCM	.365- .575	1 7/8	47	3	76	2 3/8	60	3/8
GPL-12 •	7/8 or 1	1/2 or 3/4	500-750 MCM*	.815- .999	2 5/8	67	3 3/4	95	2 3/4	70	1/2
GPL-13 •	7/8 or 1	1/2 or 3/4	750-1000 MCM*	.999-1.153	3	76	4	102	3 1/2	89	1/2
GPL-14	-	1	8 Sol.-4 Str.	.128- .232	1 3/8	34	2 3/4	70	2 5/8	67	3/8
GPL-15	-	1	4 Sol.-2/0 Str.	.204- .419	1 5/8	41	2 3/4	70	2 5/8	67	3/8
GPL-16	-	1	2/0 Sol.-250 MCM	.365- .575	1 7/8	47	3 1/4	82	2 5/8	67	3/8
GPL-17 •	-	1	300-500 MCM*	.634- .815	2 3/8	60	4 1/2	115	3	7 6	1/2
GPL-18 •	-	1	500-750 MCM*	.815- .999	2 5/8	67	4 1/2	115	3	7 6	1/2
GPL-19 •	-	1	750-1000 MCM*	.999-1.153	3	76	4 3/4	121	3 1/2	89	1/2
GPL-20	-	1 1/4	8 Sol.-4 Str.	.128- .232	1 3/8	34	3 1/2	89	3	76	3/8
GPL-21	-	1 1/4	4 Sol.-2/0 Str.	.204- .419	1 5/8	41	3 1/2	89	3	76	3/8
GPL-22	-	1 1/4	2/0 Sol.-250 MCM	.365- .575	1 7/8	47	3 1/2	89	3	76	3/8
GPL-23 •	-	1 1/4	300-500 MCM*	.634- .815	2 3/8	60	4 1/4	108	3 3/8	85	1/2
GPL-24 •	-	1 1/4	500-750 MCM*	.815- .999	2 3/4	70	5	127	3 3/4	95	1/2
GPL-25 •	-	1 1/4	750-1000 MCM*	.999-1.153	3	76	5 1/2	140	4 1/4	108	1/2
GPL-26	-	1 1/2	8 Sol.-4 Str.	.128- .232	1 3/8	34	4	102	3 1/4	82	3/8
GPL-27	-	1 1/2	4 Sol.-2/0 Str.	.204- .419	1 5/8	41	4	102	3 1/4	82	3/8
GPL-28	-	1 1/2	2/0 Sol.-250 MCM	.365- .575	1 7/8	47	4	102	3 1/4	82	3/8
GPL-29 •	-	1 1/2	300-500 MCM*	.634- .815	2 3/8	60	4 5/8	118	3 5/8	92	1/2
GPL-30 •	-	1 1/2	500-750 MCM*	.815- .999	2 3/4	70	5 1/4	133	4	102	1/2
GPL-31 •	-	1 1/2	750-1000 MCM*	.999-1.153	3	76	5 3/4	146	4 1/2	115	1/2
GPL-32	-	2	8 Sol.-4 Str.	.128- .232	1 3/8	34	4 1/4	108	3 3/4	95	3/8
GPL-33	-	2	4 Sol.-2/0 Str.	.204- .419	1 5/8	41	4 1/4	108	3 3/4	95	3/8
GPL-34	-	2	2/0 Sol.-250 MCM	.365- .575	1 7/8	47	4 1/4	108	3 3/4	95	3/8
GPL-35 •	-	2	300-500 MCM*	.634- .815	2 3/8	60	5 1/4	133	4	102	1/2
GPL-36 •	-	2	500-750 MCM*	.815- .999	2 3/4	70	5 1/2	140	4 1/2	115	1/2
GPL-37 •	-	2	750-1000 MCM*	.999-1.153	3	76	6	152	5	127	1/2

Chart continued next page

-UL listing is limited to a maximum wire size of 250 MCM.

*Not UL listed for 1/4" Pipe. * Not Certified

3/8" U-Bolt threaded as shown above, add suffix "FT" for full thread. 1/2" U-Bolt standard is full thread.

TYPE GPL

Universal parallel or 90° cable connection to rod or pipe

Made from high copper content alloy. Furnished with silicon bronze bolt, nuts and lockwashers.

Certified to maximum wire size of 250 kcmil for UL467 grounding and bonding standard.

Continued from preceding page

Catalog Number	Accommodates		Conductor Range	Wire Diameter Range	Approximate Dimensions						
	Rod	IPS			A		B		C		Bolt Dia.†
					in	mm	in	mm	in	mm	
GPL-38	-	2 1/2	8 Sol.-4 Str.	.128-.232	1 3/8	34	5	127	4 1/4	108	3/8
GPL-39	-	2 1/2	4 Sol.-2/0 Str.	.204-.419	1 5/8	41	5	127	4 1/4	108	3/8
GPL-40	-	2 1/2	2/0 Sol.-250 MCM	.365-.575	1 7/8	47	5	127	4 1/4	108	3/8
GPL-41	-	2 1/2	300-500 MCM*	.634-.815	2 3/8	60	5 5/8	143	4 1/2	115	1/2
GPL-42	-	2 1/2	500-750 MCM*	.815-.999	2 3/4	70	6	152	5	127	1/2
GPL-43	-	2 1/2	750-1000 MCM*	.999-1.153	3	76	6 1/2	165	5 1/2	140	1/2
GPL-44	-	3	8 Sol.-4 Str.	.128-.232	1 3/8	34	5 1/2	140	4 3/4	121	3/8
GPL-45	-	3	4 Sol.-2/0 Str.	.204-.419	1 5/8	41	5 1/2	140	4 3/4	121	3/8
GPL-46	-	3	2/0 Sol.-250 MCM	.365-.575	1 7/8	47	5 1/2	140	4 3/4	121	3/8
GPL-47	-	3	300-500 MCM*	.634-.815	2 3/8	60	6 1/4	158	5 1/4	133	1/2
GPL-48	-	3	500-750 MCM*	.815-.999	2 3/4	70	6 3/4	171	5 1/2	140	1/2
GPL-49	-	3	750-1000 MCM*	.999-1.153	3	76	7 1/4	184	6	152	1/2
GPL-50	-	3 1/2	8 Sol.-4 Str.	.128-.232	1 3/8	34	6 1/4	158	5 1/4	133	3/8
GPL-51	-	3 1/2	4 Sol.-2/0 Str.	.204-.419	1 5/8	41	6 1/4	158	5 1/4	133	3/8
GPL-52	-	3 1/2	2/0 Sol.-250 MCM	.365-.575	1 7/8	47	6 1/4	158	5 1/4	133	3/8
GPL-53	-	3 1/2	300-500 MCM*	.634-.815	2 3/8	60	6 3/4	171	5 3/4	146	1/2
GPL-54	-	3 1/2	500-750 MCM*	.815-.999	2 3/4	70	7 1/2	191	6	152	1/2
GPL-55	-	3 1/2	750-1000 MCM*	.999-1.153	3	76	8	203	6 1/2	165	1/2
GPL-56	-	4	8 Sol.-4 Str.	.128-.232	1 3/8	34	6 3/8	161	5 3/4	146	3/8
GPL-57	-	4	4 Sol.-2/0 Str.	.204-.419	1 5/8	41	6 3/8	161	5 3/4	146	3/8
GPL-58	-	4	2/0 Sol.-250 MCM	.365-.575	1 7/8	47	6 3/8	161	5 3/4	146	3/8
GPL-59	-	4	300-500 MCM*	.634-.815	2 3/8	60	6 3/4	171	6 1/4	158	1/2
GPL-60	-	4	500-750 MCM*	.815-.999	2 3/4	70	8	203	6 1/2	165	1/2
GPL-61	-	4	750-1000 MCM*	.999-1.153	3	76	8 1/2	216	7	178	1/2
GPL-68	-	5	8 Sol.-4 Str.	.128-.232	1 3/8	34	6 3/8	161	6 3/4	171	3/8
GPL-69	-	5	4 Sol.-2/0 Str.	.204-.419	1 17/32	38	5 5/8	143	6 13/16	173	3/8
GPL-70	-	5	2/0 Sol.-250 MCM	.365-.575	1 7/8	47	6 1/8	155	6 13/16	173	3/8
GPL-71	-	5	300-500 MCM*	.634-.815	2 5/16	59	6 1/8	155	7 1/8	181	1/2
GPL-75	-	6	4 Sol.-2/0 Str.	.204-.419	1 17/32	38	5 7/8	149	7 7/8	200	3/8
GPL-76	-	6	2/0 Sol.-250 MCM	.365-.575	1 7/8	47	7 1/8	181	7 13/16	199	3/8
GPL-77	-	6	300-500 MCM*	.634-.815	2 5/16	59	6 3/16	157	8 3/16	208	1/2
GPL-87	-	8	4 Sol. 2/0 Str.	.204-.419	1 17/32	38	7 1/8	181	9 7/8	251	3/8

*UL listing is limited to a maximum wire size of 250 MCM by UL467.
 †3/8" U-Bolt threaded as shown above, add suffix "FT" for full thread.

* Not Certified
 1/2" U-Bolt standard is full thread.

TYPE GPL-BU

Universal parallel or 90° ground conductor connection to pipe



Catalog Number	Accommodates		Ground Wire Size	Approximate Dimensions	
	Rod	IPS		Height	Width
GPL3902BU	-	1/2" - 1"	4 - 4/0 AWG	3 1/2"	3 1/4"
GPL3903BU	-	1 1/4" - 2"	4 - 4/0 AWG	4"	4 1/4"
GPL3904BU	-	2 1/2" - 3 1/2"	4 - 4/0 AWG	6 1/2"	5"
GPL3905BU	-	4" - 5"	4 - 4/0 AWG	7 1/2"	7 1/2"
GPL3906BU	-	6"	4 - 4/0 AWG	8 1/2"	8 5/8"
GPL3907BU	-	8"	4 - 4/0 AWG	10"	10 5/8"
GPL3908BU	-	10"	4 - 4/0 AWG	12"	12 3/4"
GPL3909BU	-	12"	4 - 4/0 AWG	14"	14 3/4"