

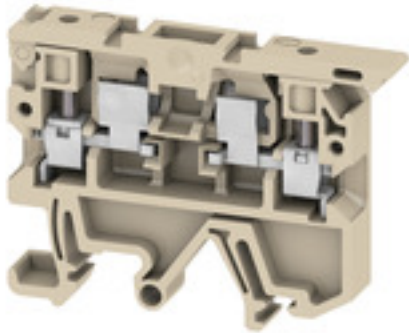
ASK1EN/SMT 10-60VUC BFI H+**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Similar to illustration

In some applications it is useful to protect the feed through connection with a separate fuse. Fuse terminal blocks are made up of one terminal block bottom section with a fuse insertion carrier. The fuses vary from pivoting fuse levers and pluggable fuse holders to screwable closures and flat plug-in fuses.

General ordering data

Version	Fuse terminal, Screw connection, 4 mm ² , 60 V, Number of connections: 2, Number of levels: 1, TS 35, TS 32, V-2, PA 66
Order No.	9123140001
Type	ASK1EN/SMT 10-60VUC BFI H+
GTIN (EAN)	4032248730919
Qty.	100 pc(s).

Creation date November 26, 2024 12:23:17 PM CET

Catalogue status 26.11.2024 / We reserve the right to make technical changes.

ASK1EN/SMT 10-60VUC BFI H+

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	43 mm	Depth (inches)	1.693 inch
Height	58 mm	Height (inches)	2.283 inch
Width	8.1 mm	Width (inches)	0.319 inch
Net weight	12.93 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

Material data

Material	PA 66	UL 94 flammability rating	V-2
----------	-------	---------------------------	-----

System specifications

Version	Screw connection, Fuse cartridge, One end without connector	Number of levels	1
Number of clamping points per level	2	Levels cross-connected internally	No
PE connection	No	Rail	TS 35, TS 32

Additional technical data

Type of mounting	Snap-on
------------------	---------

Conductors for clamping (rated connection)

Number of connections	2	Type of connection	Screw connection
-----------------------	---	--------------------	------------------

General

Rail	TS 35, TS 32
------	--------------

Rating data

Rated cross-section	4 mm ²	Rated voltage	60 V
Rated DC voltage	60 V	Volume resistance according to IEC 60947-7-x	1 mΩ
Power loss in accordance with IEC 60947-7-x	1.02 W		

Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ETIM 8.0	EC000899	ETIM 9.0	EC000899
ECLASS 9.0	27-14-11-16	ECLASS 9.1	27-14-11-16
ECLASS 10.0	27-14-11-16	ECLASS 11.0	27-14-11-16
ECLASS 12.0	27-14-11-16	ECLASS 13.0	27-25-01-13
ECLASS 14.0	27-25-01-13		

Environmental Product Compliance

RoHS Compliance Status	Compliant
REACH SVHC	No SVHC above 0.1 wt%

Creation date November 26, 2024 12:23:17 PM CET

