


## Main

Range of Product	Modicon M340 automation platform
------------------	----------------------------------



## Complementary

Number of slots	12 bus X
Product Compatibility	I/O module BMXP34 processor Specific application module BMXCPS power supply
Power Consumption in W	0.17 W
Electrical connection	1 connector (XBE) expansion module
Fixing mode	By 4 screws 0.17...0.25 in (4.32...6.35 mm) panel By 4 M6 screws plate
Height	4.08 in (103.7 mm)
Width	19.81 in (503.2 mm)
Depth	0.75 in (19 mm)
Net Weight	2.80 lb(US) (1.27 kg)

## Environment

IP Degree of Protection	IP20
Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
Relative Humidity	10...95 % without condensation
Protective treatment	TC

## Ordering and shipping details

Category	18160-MODICON M340
Discount Schedule	PC34
GTIN	3595863909029
Returnability	Yes
Country of origin	FR

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.76 in (7.000 cm)
Package 1 Width	6.30 in (16.000 cm)
Package 1 Length	22.36 in (56.800 cm)
Package 1 Weight	2.90 lb(US) (1.317 kg)

Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	15.75 in (40.000 cm)
Package 2 Length	23.62 in (60.000 cm)
Package 2 Weight	25.18 lb(US) (11.420 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	48
Package 3 Height	41.34 in (105.000 cm)
Package 3 Width	23.62 in (60.000 cm)
Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	166.49 lb(US) (75.520 kg)


## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

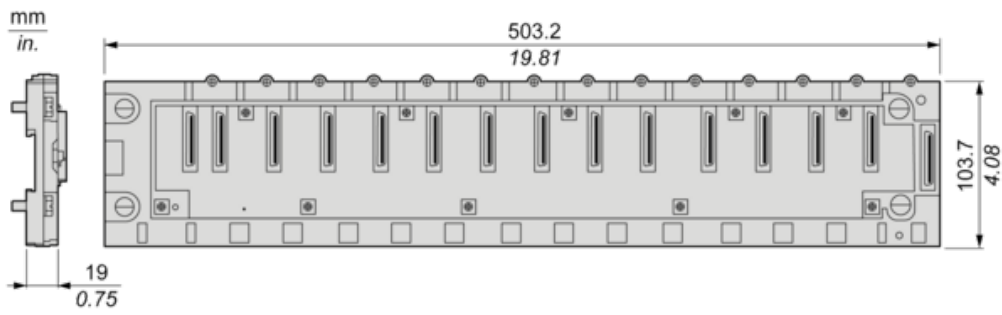

Minimum Clearance

Minimum Clearance of a typical installation in a cabinet with ducts

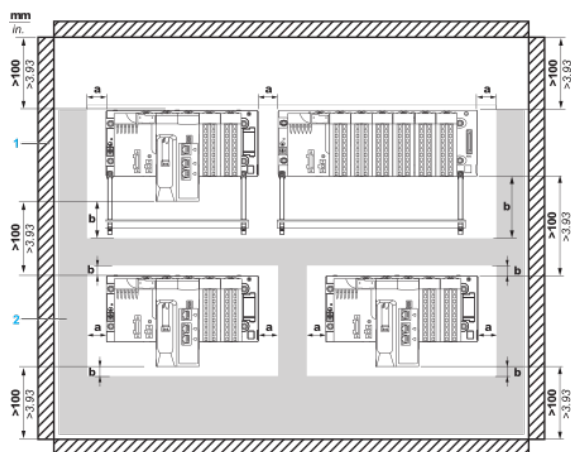


a Side clearance: > 40 mm (1.57 in.)

b Top and bottom clearance with surrounding objects: > 20 mm (0.79 in.)

1 Installation or casing


2 Wiring duct or tray

Mounting on panels

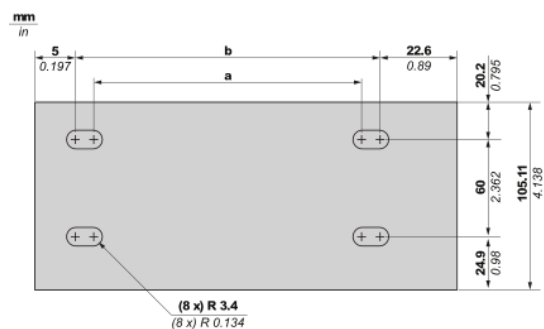

Rack Type	a
X Bus racks	BMXXBP0400 BMXXBP0400
BMXXBP0600 BMXXBP0600H	267.5 mm (10.531 in)
BMXXBP0800 BMXXBP0800H	332.5 mm (13.091 in)
BMXXBP1200 BMXXBP1200H	462.9 mm (18.224 in)

Mounting on Telequick mounting plate

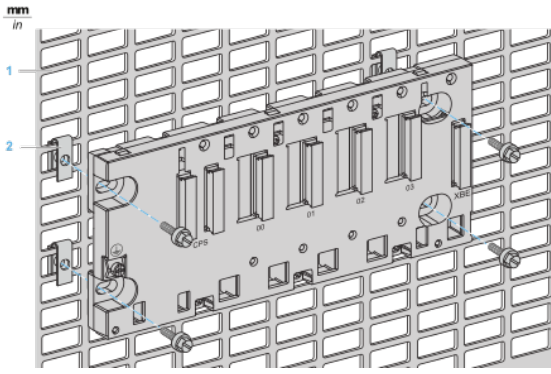

1 Telequick plate

2 Clip-on nuts

**NOTE:** The two right side screws are accessible until there is no rack extender module installed