

Technical Information Bulletin

LED Lamps



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67930
Description: CRN/S3/120W/40K/BYP/120-347/ND/E39/STD
UPC: 69549679306
Case quantity: 6




PHYSICAL DATA

Base: E39
Type: High Intensity 360°

PERFORMANCE DATA

Watts (W): 115
Install method: Ballast bypass
Lamp volts (VAC): 120-347
Colour temperature (K)¹: 4 000
Life L70 (hrs): 50 000
Bare lumens (lm)²: 16 800
Bare lamp lumens per watt (lm/W): 140
DLC lumens (lm)³: 13 800
DLC lumens per watt (lm/W): 115
CRI: 80
Beam angle (°): 360
Power factor: >0.9
THD (%): <20
Operating temperature range: - 40 °C to 45 °C (-40°F to 113 °F)

TECHNICAL DRAWINGS AND DIMENSIONS

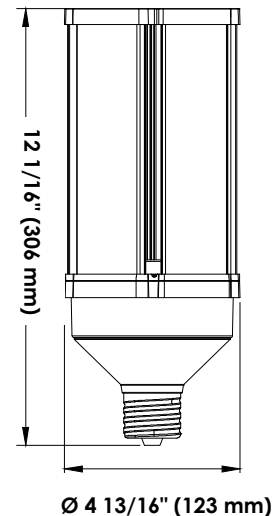

¹ Typical colour temperature range: +/- 5 %
² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %
³ DLC lumens represent lumen output when lamp is installed in a luminaire



* This product complies with UL1598C Standard for LED luminaire Retrofit kits. Not suitable for hazardous location.

| Qty | Description | Price |
|-----|-------------|-------|
| | | |

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____ Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.