

ORDERING INFORMATION

Order code: 63025
 Description: E254T5HOPS120-277/N/XTRM
 UPC: 69549630253



SPECIFICATIONS

Ballast type: Electronic
Starting method: Program Start
Lamp connection: Series
Input voltage (V): 120-277V
Input frequency (Hz): 60HZ
Max. case temperature: 90 °C
Thermal protection: Class P

Type: 1 Outdoor
Contains PCBs: No
Sound rating: A
Open current voltage (OCV) (V): 600
Inherent thermal protection: Yes
Lamp protection circuit: Yes
ICES-005 Compliant: Class A RFLD
End of life (EoL) protection: Yes
Auto-restrike: Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
120 VOLTS										
F54T5HO (54W)	2	54	-22/-30	0.97	116	1.00	10	0.99	1.7	0.86
F54T5HO/ES (49W)	2	49	-22/-30	0.91	107	1.00	10	0.99	1.7	0.93
F54T5HO/ES (47W)	2	47	-22/-30	0.90	105	1.00	10	0.99	1.7	0.95
PL55/TTL (55W)	2	55	-22/-30	0.94	111	0.92	10	0.99	1.7	0.83
PL50/TTL (50W)	2	50	-22/-30	0.94	112	1.08	10	0.99	1.7	0.96
F39T5HO (39W)	2	39	-22/-30	0.76	92	1.02	10	0.99	1.7	1.11
F54T5HO (54W)	1	54	-22/-30	0.50	60	1.02	10	0.98	1.7	1.70
F54T5HO/ES (49W)	1	49	-22/-30	0.48	56	1.02	10	0.98	1.7	1.82
F54T5HO/ES (47W)	1	47	-22/-30	0.47	54	1.02	10	0.98	1.7	1.89
PL55/TTL (55W)	1	55	-22/-30	0.49	58	0.95	10	0.98	1.7	1.64
PL50/TTL (50W)	1	50	-22/-30	0.49	58	1.10	10	0.98	1.7	1.90
230 VOLTS										
F54T5HO (54W)	2	54	-22/-30	0.51	117	1.00	10	0.99	1.7	0.85
F54T5HO/ES (49W)	2	49	-22/-30	0.47	108	1.00	10	0.99	1.7	0.93
F54T5HO/ES (47W)	2	47	-22/-30	0.46	105	1.00	10	0.99	1.7	0.95
PL55/TTL (55W)	2	55	-22/-30	0.49	111	0.92	10	0.99	1.7	0.83
PL50/TTL (50W)	2	50	-22/-30	0.49	111	1.08	10	0.99	1.7	0.97
F39T5HO (39W)	2	39	-22/-30	0.40	92	1.02	10	0.99	1.7	1.11
F54T5HO (54W)	1	54	-22/-30	0.27	62	1.02	15	0.98	1.7	1.65
F54T5HO/ES (49W)	1	49	-22/-30	0.25	58	1.02	15	0.98	1.7	1.76
F54T5HO/ES (47W)	1	47	-22/-30	0.24	54	1.02	15	0.98	1.7	1.89
PL55/TTL (55W)	1	55	-22/-30	0.25	58	0.95	15	0.98	1.7	1.64
PL50/TTL (50W)	1	50	-22/-30	0.25	58	1.10	15	0.98	1.7	1.90

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.


Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015

ORDERING INFORMATION

Order code: 63025
 Description: E254T5HOPS120-277/N/XTRM
 UPC: 69549630253

Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
277 VOLTS										
F54T5HO (54W)	2	54	-22/-30	0.43	118	1.00	15	0.98	1.7	0.85
F54T5HO/ES (49W)	2	49	-22/-30	0.40	109	1.00	15	0.98	1.7	0.92
F54T5HO/ES (47W)	2	47	-22/-30	0.39	107	1.00	15	0.98	1.7	0.93
PL55/TTL (55W)	2	55	-22/-30	0.40	113	0.92	15	0.98	1.7	0.81
PL50/TTL (50W)	2	50	-22/-30	0.40	112	1.08	15	0.98	1.7	0.96
F39T5HO (39W)	2	39	-22/-30	0.33	92	1.02	15	0.98	1.7	1.11
F54T5HO (54W)	1	54	-22/-30	0.23	63	1.02	15	0.97	1.7	1.62
F54T5HO/ES (49W)	1	49	-22/-30	0.21	59	1.02	20	0.97	1.7	1.73
F54T5HO/ES (47W)	1	47	-22/-30	0.20	57	1.02	20	0.97	1.7	1.79
PL55/TTL (55W)	1	55	-22/-30	0.21	59	0.95	20	0.97	1.7	1.61
PL50/TTL (50W)	1	50	-22/-30	0.21	59	1.10	20	0.97	1.7	1.86

WIRING DIAGRAM

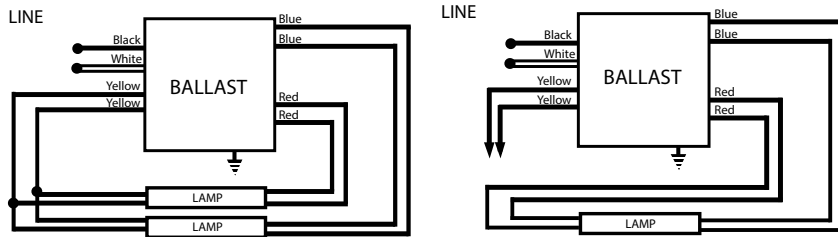


LEADS LENGTH

Black	18.8" (48.0 cm)
White	18.8" (48.0 cm)
Blue	30.9" (78.5 cm)
Red	30.9" (78.5 cm)
Yellow	46.4" (118.0 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.10 cm)
Width (W):	1.70" (4.30 cm)
Height (H):	1.14" (2.90 cm)
Mounting (M):	8.90" (22.60 cm)

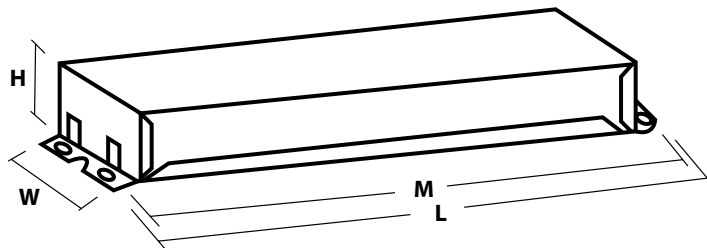

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 9, 2015