


Twisted Pair Connectors



Klein's data and telephone plugs are professional-grade and deliver consistent, reliable performance.

They feature thick 50 micro-inch gold plating on the contact plates, three-pronged solid and stranded wire contacts, and durable connector housings. Expect a sure connection each and every time.




Connector Type	UY	UR	RJ11	RJ11	RJ45	
Position & Contacts	2P2C	3P3C	6P4C	6P6C	8P8C	
Connector Design	1-Piece	1-Piece	1-Piece	1-Piece	1-Piece	3-Piece
Gold Plating Thickness (micro-inch)			50µ"	50µ"	50µ"	50µ"
Cable Type:						
CAT 3	●	●	●	●		
CAT 5					●	
CAT 5e					●	
CAT 6						●
Solid Conductor Wire	●	●	●	●	●	●
Stranded Conductor Wire					●	●
Connector Color	Yellow	Red	Clear	Clear	Clear	Clear
Cat. No.						
Pack Size: 10					VDV826-628	
Pack Size: 25	VDV826-604	VDV826-605	VDV826-601	VDV826-600		VDV826-603
Pack Size: 50					VDV826-602	
Pack Size: 100					VDV826-611	
Crimping Type	IDC			Modular Plug Connector		
Klein Crimping Tools	D234-6, D234-6C, VDV026-049			VDV226-011, VDV226-107		

RJ45 Modular Data Plugs

- 8 position 8 contact.
- For solid or stranded conductors.

Cat. No.	Connector Type	Cable Type	Connector Color	Pack Qty.
VDV826-628	RJ45	CAT 5 / CAT 5e	clear	10
VDV826-602	RJ45	CAT 5 / CAT 5e	clear	50
VDV826-611	RJ45	CAT 5 / CAT 5e	clear	100
VDV826-603	RJ45	CAT 6	clear	25

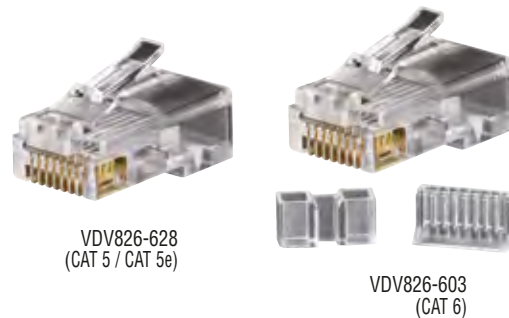

RJ11 Telephone Plugs

- 6 position 4 contact for 1 or 2 line telephones.
- 6 position 6 contact for 1, 2 or 3 line telephones.



6P4C



6P6C



VDV826-600

Cat. No.	Connector Type	Position & Contacts	Connector Color	Pack Qty.
VDV826-601	RJ11	6P4C	clear	25
VDV826-600	RJ11	6P6C	clear	25

Insulation Displacement Connectors

- Insulation displacement connector to add or terminate a telephone line.
- Gel-filled for moisture resistance.



VDV826-604
2 wire
(26-22 AWG)



VDV826-605
3 wire
(26-19 AWG)

Cat. No.	Connector Type	Position & Contacts	Connector Color	Pack Qty.
VDV826-604	UY	2P2C	yellow	25
VDV826-605	UR	3P3C	red	25

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 296 for additional information on warnings.

