


Product data sheet

Characteristics

NC0240

Circuit breaker, Stab-Lok, 40A, 2 pole,
120/240VAC, 10kA, plug in mount

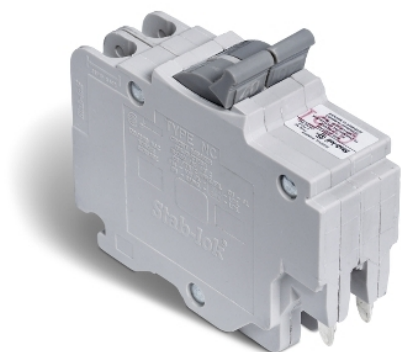

Main

| | |
|--------------------------------|---------------------------|
| Range of Product | Stab-lok |
| Product or Component Type | Miniature circuit-breaker |
| Line Rated Current | 40 A |
| [Ue] rated operational voltage | 120/240 V AC |
| Poles description | 2P |
| Breaking capacity | 10 kA |

Complementary

| | |
|-----------------------|-----------------------|
| Mounting Mode | Plug-in |
| Electrical Connection | Screw connector |
| AWG gauge | AWG 14...AWG 6 copper |

Environment

| | |
|------------------------|-----|
| Product Certifications | CSA |
|------------------------|-----|

Ordering and shipping details

| | |
|-------------------|-------------------------|
| Category | 39997-CANADIAN PRODUCTS |
| Discount Schedule | NET |
| GTIN | 785901388906 |
| Returnability | Yes |
| Country of origin | MX |

Packing Units

| | |
|------------------------------|---------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 1.00 in (2.54 cm) |
| Package 1 Width | 3.00 in (7.62 cm) |
| Package 1 Length | 3.40 in (8.636 cm) |
| Package 1 Weight | 6.24 oz (176.901 g) |

Offer Sustainability

| | |
|----------------------------|--|
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Compliant with Exemptions |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.