

Cam-Lok J series E1016 accessories

NEMA 3R

11P

600 VAC/VDC, up to 400A continuous

J series E1016, elastomeric

Features:

- Double cam principle provides a positive, vibration-proof connection
- Self-compensating for wear
- No moving contact surfaces, eliminating arcing or burning
- Superior electromechanical connections
- Locked contacts will withstand a pulling force of 1,000 lbs.
- 1/3 of a turn assures a high pressure contact approaching 600 lbs. per sq. in., providing minimum resistance
- Contacts carefully machined from a high conductivity brass to provide a smooth sliding fit and easy locking action
- Watertight elastomeric body molded from colorfast material, color-coded for easy phase identification
- Recessed contacts protected by insulating jacket that extends beyond contact ends for safety

Certifications and compliances:

- Listed to UL1691
- Listed to CSA C22.2 No. 1691-12
- CSA certified to C22.2 No. 182.3 LR13963

Environmental rating:

- NEMA 3R

Material characteristics:

- Body – TPE
- Temperature rating – operating ambient: -40°C to 105°C

Ordering information:



E1016-2324



A100601-17

Three-way lay down 'T' connectors


Color	Cat. # Paralleling 'T' M-M-F	Cat. # Tapping 'T' M-F-F	Cat. # Tapping 'T' M-F-M	Cat. # Tapping 'T' M-M-M	Cat. # Tapping 'T' F-F-F	Cat. # Tapping 'T' F-F-M
Black	E1016-2324	E1016-2312	E1016-2318	E1016-2300	E1016-2306	E1016-2330
Red	E1016-2326	E1016-2314	E1016-2320	E1016-2302	E1016-2308	E1016-2332
Green	E1016-2328	E1016-2316	E1016-2322	E1016-2304	E1016-2310	E1016-2334
White	E1016-2329	E1016-2317	E1016-2323	E1016-2305	E1016-2311	E1016-2335
Blue	E1016-2348	E1016-2350	E1016-2359	E1016-2351	E1016-2349	E1016-2360
Brown	E1016-2371	E1016-2395	E1016-2372	E1016-2373	E1016-2374	E1016-2375
Orange	E1016-2327	E1016-2315	E1016-2321	E1016-2303	E1016-2309	E1016-2333
Yellow	E1016-2325	E1016-2313	E1016-2319	E1016-2301	E1016-2307	E1016-2331

Protective caps with lanyards (Not UL Listed)

Color	Cat. # Male	Cat. # Female
Black	A100601-17	A100602-17
Red	A100601-19	A100602-19
Green	A100601-21	A100602-21
White	A100601-22	A100602-22
Blue	A100601-24	A100602-24
Brown	A100601-23	A100602-23
Orange	A100601-20	A100602-20
Yellow	A100601-18	A100602-18
Aluminum	100444	SPACER

To order single packaged products, add suffix 'K' to the complete catalog number.

Dimensions:

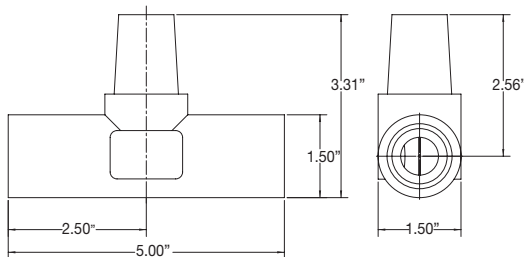

Three-way lay down 'T' connectors