


UGXMXMXAD

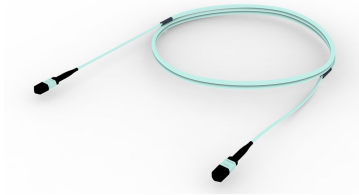

Ultra Low Loss (ULL) OM4 MPO12 (Pinned) to MPO12 (Pinned), Fiber Trunk Cable Assembly, 12-Fiber, Plenum

Product Classification

Regional Availability	Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications

Color, boot A	Black
Color, boot B	Black
Color, connector A	Aqua
Color, connector B	Aqua
Construction Type	Stranded
Fibers per Subunit, quantity	12
Furcation Color	Aqua
Interface, Connector A	MPO-12/UPC
Interface, Connector B	MPO-12/UPC
Jacket Color	Aqua
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	12


Dimensions

Breakout Length	33 in
------------------------	-------

UGXMXMXAD

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

Ordering Tree

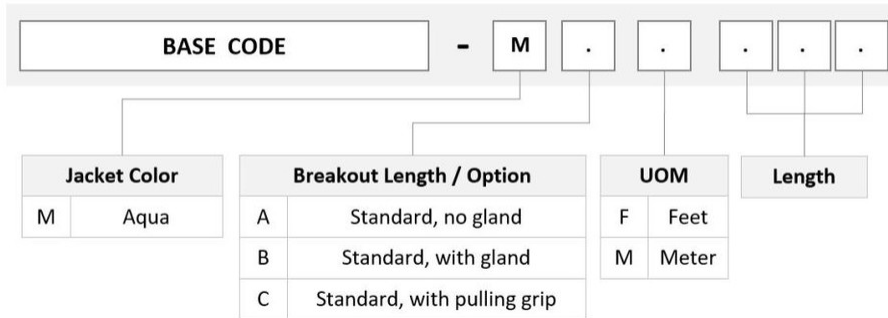

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 ° 4.40 lb @ 90 °
--	---------------------------------

Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM4, LazrSPEED®

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Indoor Plenum

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



Included Products

760051656	-	LazrSPEED® Plenum MPO Trunk Cable, 12 fiber
P-012-MP-5K-F12AQ		
860366228	-	MPO12, ULTRA LOW LOSS, MALE, OM3/4, AQUA, 3mm