

URGMPPMPGD



Ultra Low Loss (ULL) Singlemode MPO12 (Unpinned) to MPO12 (Unpinned), Fiber Extension Cable Assembly, 12-Fiber, Low Smoke Zero Halogen

Product Classification

| | |
|------------------------------|--|
| Regional Availability | Asia Australia/New Zealand Europe Latin America Middle East /Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber array cable assembly |
| Product Brand | SYSTIMAX ULL |
| Ordering Note | For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration |

General Specifications

| | |
|-------------------------------------|-------------------------|
| Color, boot A | Black |
| Color, boot B | Black |
| Color, connector A | Green |
| Color, connector B | Green |
| Construction Type | Stranded |
| Fibers per Subunit, quantity | 12 |
| Furcation Color | Yellow |
| Interface, Connector A | MPO-12/APC |
| Interface, Connector B | MPO-12/APC |
| Jacket Color | Yellow |
| Polarity | Method B Enhanced (ULL) |
| Total Fibers, quantity | 12 |

Dimensions


| | |
|------------------------|-------|
| Breakout Length | 33 in |
|------------------------|-------|

URGMMPMGD

Cable Assembly Length Range (m) 1 – 305

Cable Assembly Length Range (ft) 1 – 999

Ordering Tree

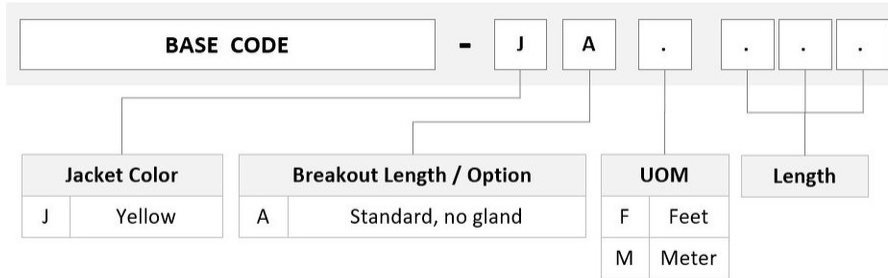

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Above maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant/Exempted |



Included Products

760237972 – Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 12

URGMPMPGD

N-012-MP-8G1-F30YL/D fiber
860638318 - MPO12, ULTRA LOW LOSS, FEMALE, SM, GREEN, 3mm