

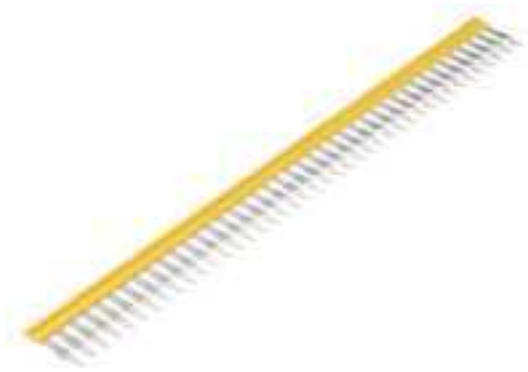
ZQV 4N/41**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

General ordering data

Version	W-Series, Cross-connector, 32 A
Order No.	1758270000
Type	ZQV 4N/41
GTIN (EAN)	4032248169801
Qty.	10 pièce(s)
Delivery status	Discontinued
Available until	2021-12-31
Alternative product	2883810000

ZQV 4N/41**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques**Dimensions and weights**

Depth	25,7 mm	Depth (inches)	1,012 inch
Height	248,8 mm	Height (inches)	9,795 inch
Width	2,8 mm	Width (inches)	0,11 inch
Net weight	2 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

Material data

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

System specifications

Version	For the terminals
---------	-------------------

Additional technical data

Type of fixing	Plugged
----------------	---------

Cross-connector

Rated current, 2-pole	32 A	Rated current, multi-pole	32 A
Type	Cross-connector		

Dimensions

Pitch in mm (P)	6,1 mm
-----------------	--------

General

Number of poles	41
-----------------	----

Rating data

Rated current	32 A
---------------	------

Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ETIM 9.0	EC000489
ECLASS 9.0	27-14-11-40	ECLASS 9.1	27-14-11-40
ECLASS 10.0	27-14-11-40	ECLASS 11.0	27-14-11-40
ECLASS 12.0	27-14-11-40	ECLASS 13.0	27-25-03-03
ECLASS 14.0	27-25-03-03		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

ZQV 4N/41

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Caractéristiques techniques

Important note

Product information Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used

Approvals

ROHS Conform

Downloads

Engineering Data	CAD data – STEP
User Documentation	Storage Conditions Terminal Blocks User Manual ZQV 2.5
Catalogues	Catalogues in PDF-format