


# 8736SCO7V02H309S

NEMA Starter, Type S, reversing, vertical, Size 1, 27A, 10 HP at 575 VAC, up to 100 kA SCCR, 3 phase, 3 pole, Motor Logic SSOLR, 120 VAC coil, open

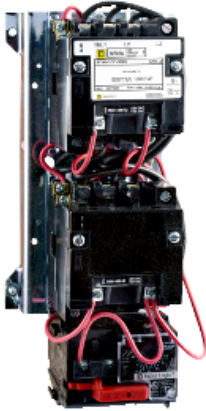

## Principal

Product Type	Starter
Product Range	S
Starter Type	Réversible

## Complémentaire

NEMA Size	1
Rated Current	27 A
Number of Poles	3P
Mounting Orientation	Vertical
Wiring Mode	3 fils
Maximum Voltage Rating	600 V AC
Phase	3 phases
Type of Overload	Solid state Motor Logic class 10/20
Horsepower Rating	7.5 HP at 200 V AC 7.5 HP at 230 V AC 10 HP at 460 V AC 10 HP at 575 V AC
SCCR	Circuit-breaker 70 A maximum: 100 kA at 480 V AC Fuse J 60 A maximum: 100 kA at 600 V AC Fuse T 60 A maximum: 100 kA at 600 V AC Fuse RK1 60 A maximum: 100 kA at 600 V AC Fuse RK5 60 A maximum: 100 kA at 600 V AC
Coil Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Control Circuit Type	Separate control circuit
Control Units	No control units

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Pilot Light	Without pilot light
Auxiliary Contacts	Without
Terminal Type	Borniers à vis-étrier
Height	292,61 mm
Width	138,94 mm
Depth	134,87 mm

## Environnement

Enclosure Type	Not rated (open device)
Certifications	Listé UL CSA

## Emballage

Poids de l'emballage (Kg)	4,917 kg
Hauteur de l'emballage 1	22,098 cm
Largeur de l'emballage 1	29,464 cm
Longueur de l'emballage 1	34,798 cm

## Offre de la durabilité

Directive RoHS UE	Non conforme
Régulation RoHS Chine	<a href="#">Déclaration RoHS pour la Chine</a> Produit en dehors du périmètre RoHS pour la Chine. Déclaration relative aux substances pour votre information.

## Garantie contractuelle

Garantie	18 months
----------	-----------