


FANOUT KIT

PDS-0219-EN-B

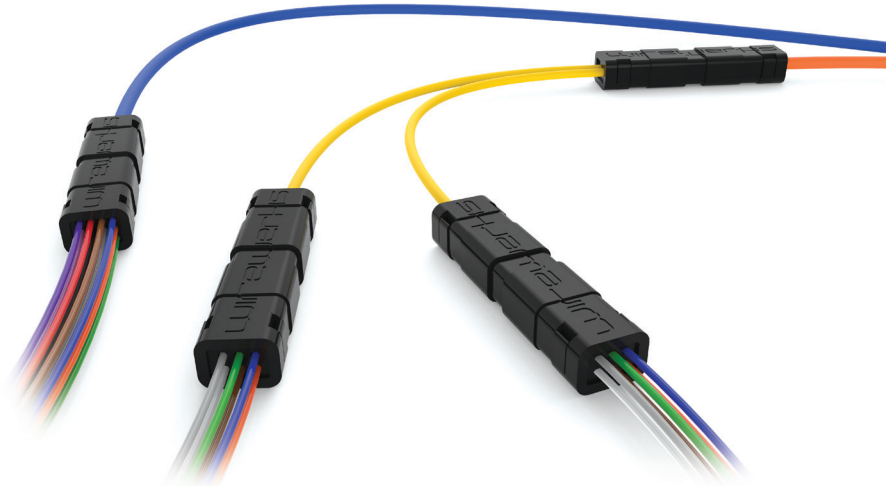

DESCRIPTION

Wirewerks fanout kit provides the ideal solution for breakout operations in the field or in factory. It allows to quickly and easily separate the subunits' bare fiber to single furcation tubings, protecting and allowing for termination. The buffer tubes are color coded for easy fiber identification as defined in ANSI/TIA-598-C, the standard for fiber optic cables color coding. These fanout kits are offered in formats suitable for both loose-tube or ribbon construction, with 6, 12 fiber or 2 subunit management options.

FEATURES AND BENEFITS

- Compact size
- Easy to install
- Snap-together system
- Modular design for multiple combinations of entry and exit cables
- Symmetrical design for ease of assembly
- Multiple choices of exit tubing, including TIA/EIA-598 color coded tubing
- Adapts to various entry (feeder) cables

APPLICATIONS

- Telecommunications
- Long Haul Networks
- Consolidation Point
- Catv
- Buildings Interconnections

PACKAGING

Clear Poly Bag

Contains:

- 1x Fan-out kit base
- 1x Fan-out kit cover
- 1x Fan-out kit exit module
- 1x Fan-out feeder module
- 1x Instruction sheet

CERTIFICATION AND COMPLIANCE

RoHS
Directive on Restriction of Hazardous Substances



ASTM-A653
Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

UL 94 FIRE RATING
Tests for Flammability of Plastic Material for Parts in Devices and Appliances

TIA/EIA-598-C
Optical Fiber Cable Color Coding


TELCORDIA GR-2866-CORE
Generic Requirements for Optical Fiber Fanouts

ORDERING INFORMATION

FOKS 							
Feeder Cable		Exit Cable		Exit Cable Color		Exit Tubing Length	
12	1 x 2mm	90	12 x 900µm	CC	Color coded	25	25 inches
13	1 x 3mm	96	6 x 900µm	BL	Blue	36	36 inches
1R	1 x Ribbon	32	2 x 3mm	YL	Yellow	47	47 inches
				OR	Orange		
				AQ	Aqua		

FOKS *Fan Out Kit Small*

PHYSICAL CHARACTERISTICS

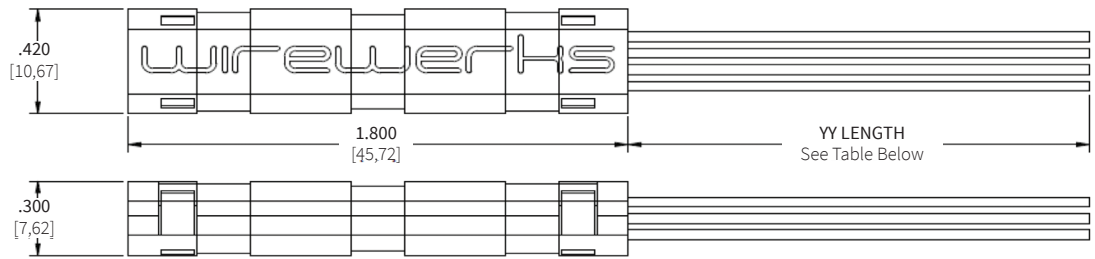

Parameter	Value
(YY Length Options)	25, 36, or 47 inches

MODULES

Entry Cable Options
Ribbon
Round 2mm
Round 3mm

Exit Cable Options
2 x 2mm color of your choice (aqua, yellow, or orange)
6 x 900µm color coded
12 x 900µm color coded

