

BCH2MR3023CA6C

servo motor BCH, Lexium 28, 180mm, 3000W, 53.56kg.cm², with oil seal, with key, straight connection



Main

Range Compatibility	Lexium 28
Product or Component Type	Servo motor
Device short name	BCH2

Complementary

Maximum mechanical speed	3000 rpm
[Us] rated supply voltage	220 V
Phase	Three phase
Continuous stall current	16.33 A
Continuous stall torque	126.74 Lbf.in (14.32 N.m) LXM26D 19.8 A, 220 V, three phase 126.74 lbf.in (14.32 N.m) LXM28... 19.8 A, 220 V, three phase
Continuous power	3000 W
Peak stall torque	380.32 Lbf.in (42.97 N.m) LXM26D 19.8 A, 220 V, three phase 380.32 lbf.in (42.97 N.m) LXM28... 19.8 A, 220 V, three phase
Nominal output power	3000 W LXM26D 19.8 A, 220 V, three phase 3000 W LXM28... 19.8 A, 220 V, three phase
Nominal torque	126.74 Lbf.in (14.32 N.m) LXM26D 19.8 A, 220 V, three phase 126.74 lbf.in (14.32 N.m) LXM28... 19.8 A, 220 V, three phase
Nominal speed	2000 rpm LXM26D 19.8 A, 220 V, three phase 2000 rpm LXM28... 19.8 A, 220 V, three phase
Maximum current Irms	53.9 A LXM26D 3 kW, 220 V 53.9 A LXM28... 3 kW, 220 V
Maximum permanent current	18.8 A
Product compatibility	LXM26D servo drive 3 kW, 220 V, three phase LXM28... servo drive 3 kW, 220 V, three phase
Shaft end	Keyed
Shaft diameter	1.38 in (35 mm)
Shaft length	3.11 in (79 mm)
Key width	0.39 in (10 mm)
Feedback type	20 bits single turn absolute encoder
Holding brake	Without
Mounting Support	Asian standard flange
Motor flange size	7.09 in (180 mm)
Electrical connection	Connector MIL
Torque constant	0.88 N.m/A 68 °F (20 °C)
Back emf constant	53 V/krpm 68 °F (20 °C)
Rotor inertia	53.56 kg.cm ²
Stator resistance	0.131 Ohm 68 °F (20 °C)
Stator inductance	2.7 mH 68 °F (20 °C)
Stator electrical time constant	20.61 ms 68 °F (20 °C)

Maximum radial force Fr	1200 N 2000 rpm
Maximum axial force Fa	497 N
Brake pull-in power	49.6 W
Type of cooling	Natural convection
Length	7.95 in (202 mm)
Number of motor stacks	2
Centring collar diameter	4.50 in (114.3 mm)
Centring collar depth	0.16 in (4 mm)
Number of mounting holes	4
Mounting holes diameter	0.53 in (13.5 mm)
Circle diameter of the mounting holes	7.87 in (200 mm)
Distance shaft shoulder-flange	0.16 in (4 mm)
Net Weight	40.79 lb(US) (18.5 kg)

Environment

IP Degree of Protection	IP50 IM V3 IP65 IM B5, IM V1
Ambient Air Temperature for Operation	-4...104 °F (-20...40 °C)






Ordering and shipping details

Category	18281-LEXIUM 23/28 MOTORS
Discount Schedule	PC53
GTIN	3606480734823
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.65 in (24.5 cm)
Package 1 Width	11.42 in (29.0 cm)
Package 1 Length	23.03 in (58.5 cm)
Package 1 Weight	44.49 lb(US) (20.18 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes

Dimensions


Dimensions of Motor



	mm	in.
L (without holding brake)	202	7.95
L (with holding brake)	235	9.25
A	79	3.11
C	73	2.87
D	35	1.38
F	63	2.48
N	28	1.10
M	M12	
R	30	1.18
V	10	0.39
W	10	0.39
Z	136	5.35

Torque/Speed Curves with 230 V Three Phase Supply Voltage

Servo Motor with LXM28AU30●●● Servo Drive

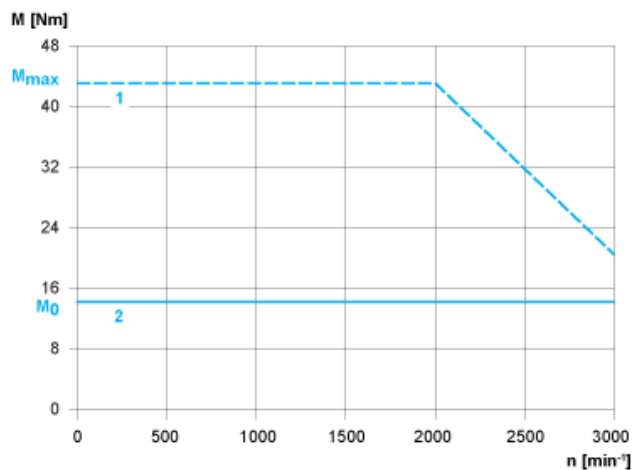

- 1 : Peak torque
- 2 : Continuous torque