

TSXP573623AM

Double-format PL7 processor, Modicon Premium, Internal RAM 64Kwords program & data, transparent ready, PL7 Junior/Pro



Main

Range of Product	Modicon Premium Automation platform
Product or Component Type	Double-format PL7 processor
Software Designation	PL7 Junior/Pro

Complementary

Concept	Transparent Ready
Number of racks	16 4/6/8 slots 8 12 slots
Number of slots	96 128 64
Discrete I/O processor capacity	1024 I/O
Analogue I/O processor capacity	128 I/O
Number of application specific channel	32
Number of process control channel	15 up to 45 simple loops
Integrated connection type	Ethernet TCP/IP RJ4510/100 Mbit/s) Non isolated serial link 2 female mini DIN19.2/115 kbit/s)
Communication module processor capacity	1 fieldbus modules (1 if CANopen used) 8 AS-Interface bus modules 2 fieldbus 2 network module
Memory description	Internal RAM (with PCMCIA card) 80 Kwords data Internal RAM (without PCMCIA card) 64 Kwords program and data PCMCIA card 2688 Kwords additional data storage PCMCIA card 384 Kwords program
Maximum size of object areas	16384 %Mi located internal bits 30.5 %MWi internal words located internal data 32 %KW constant words located internal data
Application structure	1 master task 1 fast task 64 event tasks
Execution time per instruction	2.6 µs floating points with PCMCIA card 0.12 µs Boolean without PCMCIA card 0.17 µs Boolean with PCMCIA card 0.17 µs word or fixed-point arithmetic without PCMCIA card 0.33 µs word or fixed-point arithmetic with PCMCIA card 2.5 µs floating points without PCMCIA card
Number of instructions per ms	3.08 Kinst/ms 65 % Boolean + 35 % fixed arithmetic with PCMCIA card 4.49 Kinst/ms 100 % Boolean with PCMCIA card 4.7 Kinst/ms 65 % Boolean + 35 % fixed arithmetic without PCMCIA card 6.57 Kinst/ms 100 % Boolean without PCMCIA card
System overhead	0.29 Ms fast task 1.15 ms master task
Marking	CE

Local signalling	For Ethernet TCP/IP port ready (RUN) 1 LED (green) For processor running (RUN) 1 LED (green) For collision detection (COL) 1 LED (red) For Ethernet TCP/IP port fault (ERR) 1 LED (red) For I/O module or configuration fault (I/O) 1 LED (red) For processor or system fault (ERR) 1 LED (red) For activity on the terminal port (TER) 1 LED (yellow) For Ethernet link diagnostics (STS) 1 LED (yellow) For reception activity (RX) 1 LED (yellow) For transmission activity (TX) 1 LED (yellow)
Current consumption	1360 mA 5 V DC
Module format	Double

Environment

Standards	CSA C22.2 No 213 Class I Division 2 Group B 89/336/EEC CSA C22.2 No 213 Class I Division 2 Group C UL 508 CSA C22.2 No 142 93/68/EEC 73/23/EEC IEC 61131-2 CSA C22.2 No 213 Class I Division 2 Group A 92/31/EEC CSA C22.2 No 213 Class I Division 2 Group D
Product Certifications	RINA[RETURN]BV[RETURN]ABS[RETURN]DNV[RETURN]RMRS[RETURN]JGL[RETURN]JLR
Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
Ambient Air Temperature for Storage	-13...158 °F (-25...70 °C)
Relative Humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...6561.68 ft (0...2000 m)
Protective treatment	TC
IP Degree of Protection	IP20
Pollution degree	2

Ordering and shipping details

Category	22558-TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	3595863914634
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.74 in (9.5 cm)
Package 1 Width	7.09 in (18.0 cm)
Package 1 Length	10.24 in (26.0 cm)
Package 1 Weight	26.91 oz (763.0 g)
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Height	11.81 in (30.0 cm)
Package 2 Width	15.75 in (40.0 cm)
Package 2 Length	23.62 in (60.0 cm)
Package 2 Weight	12.18 lb(US) (5.525 kg)

Offer Sustainability


California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm.For more information go to www.p65warnings.ca.gov
---------------------------	---

Contractual warranty

Warranty	18 months
----------	-----------

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

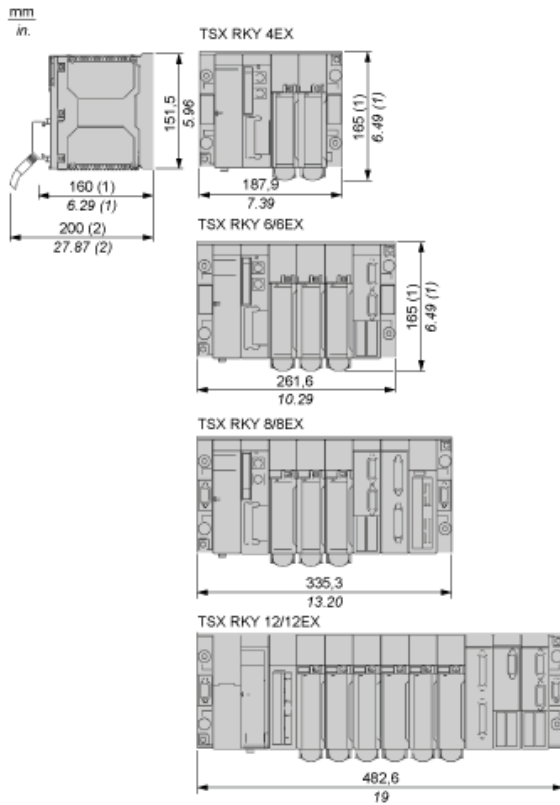

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.